

DS-K5033TMW-D Visitor Terminal



- Android 11 system
- Supports paperless visitor enrollment
- Dual-screen design. 15.6-inch main screen and 10.1-inch auxiliary screen
- Supports both stand-alone and networked visitor management applications
- Up to 300,000 visitor records can be stored on the device
- Supports advertisements playing
- Supports QR code scanning and swiping card for visitor pass
- Supports passport OCR
- Assisted visitor terminal
- Comes with a 58 mm thermal printer



▪ Specification


| System | |
|------------------------|---|
| Operation system | Android11 |
| Display | |
| Size | Main Screen (Operator): 15.6-inch 1920 × 1080 Touch Screen Auxiliary Screen (Visitor): 10.1-inch 1280 × 800 Screen |
| Resolution | 1920 × 1080 |
| Video | |
| Pixel | 2 MP |
| Lens | 2 |
| WDR | Support |
| Video standard | PAL (Default)/NTSC |
| Audio | |
| Audio output | Built-in loudspeaker |
| Network | |
| Wired network | Support |
| Wi-Fi | Support, 2.4 G |
| Interface | |
| Network interface | 1 |
| Power interface | Round |
| USB | 3 |
| Capacity | |
| Visitor record | 300,000 |
| Authentication | |
| Card type | M1 card |
| Card reading frequency | 13.56 MHz |
| Card reading distance | 0 to 4 cm |
| Card reading duration | < 1 s |
| General | |
| Indicator | Red/green indicator |
| Power supply | 12 VDC, 5 A |
| Working temperature | -10 °C to 50 °C (14 °F to 122 °F) |
| Working humidity | 10% to 90% (no condensing) |

▪ Available Model

DS-K5033TMW-D

▪ Dimension

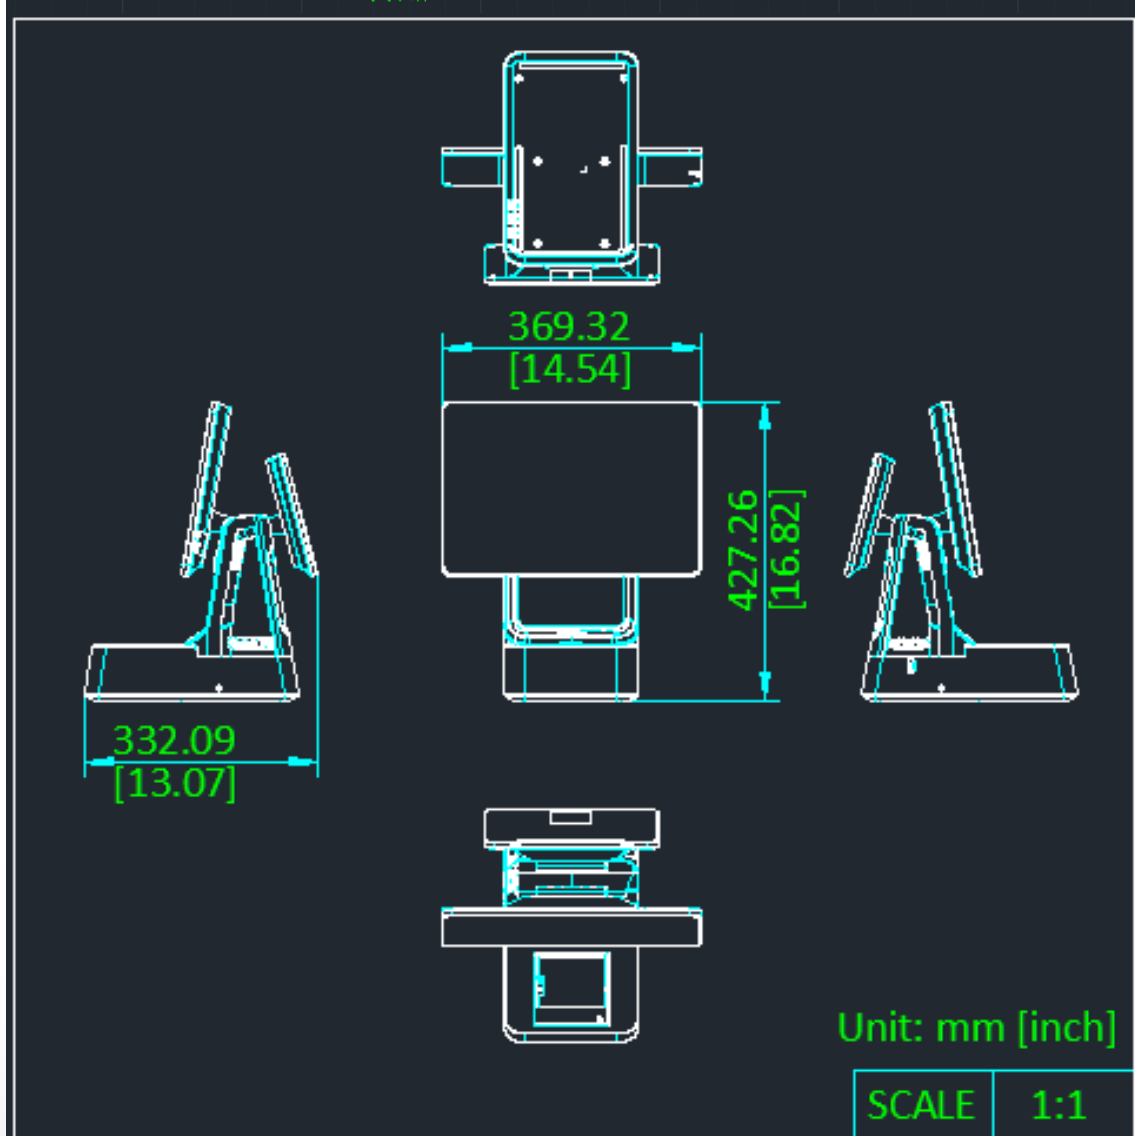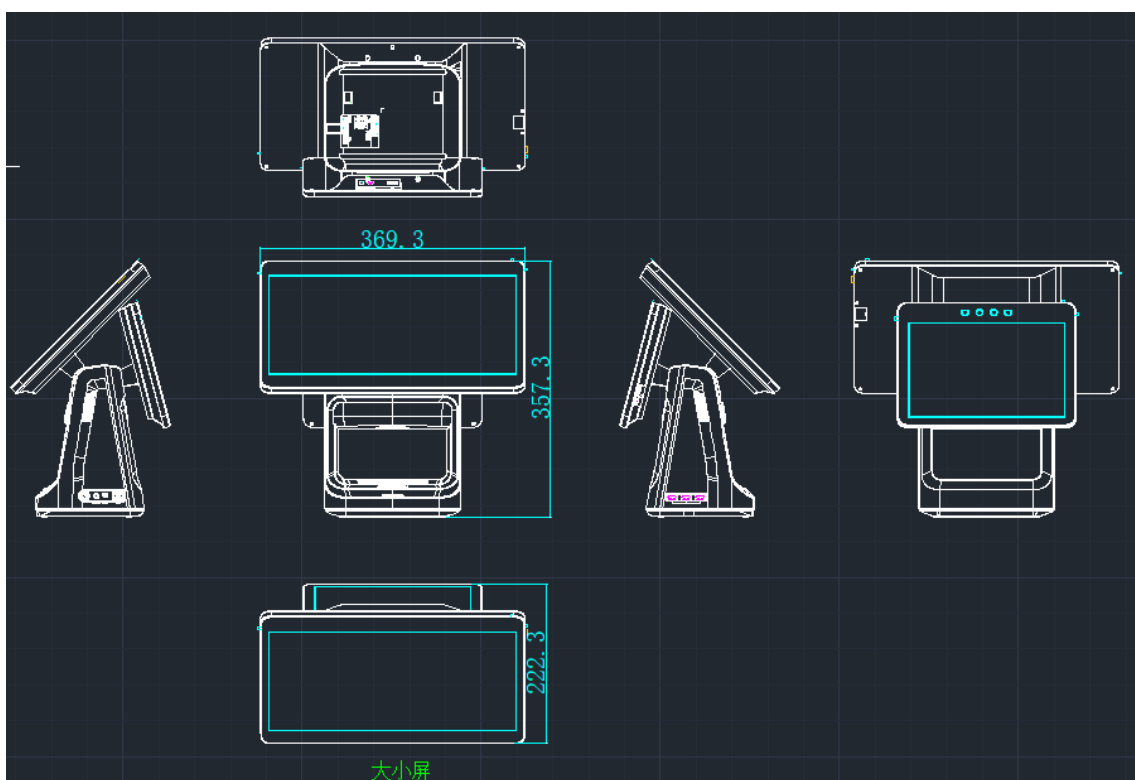

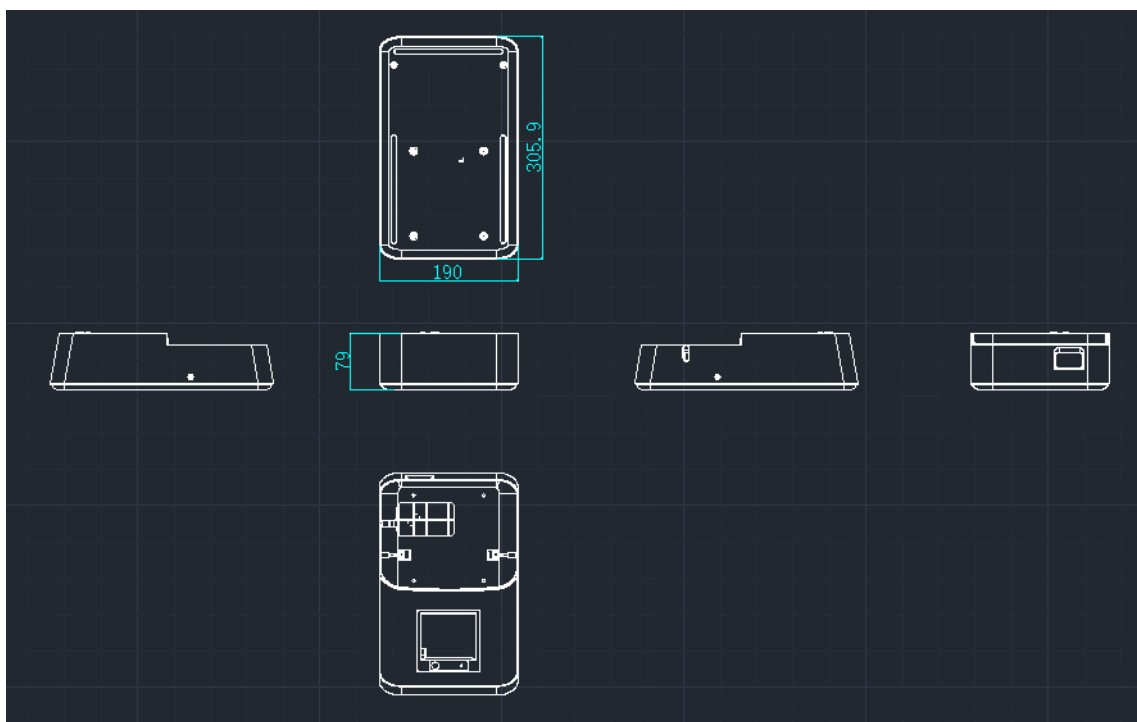

See Far, Go Further



www.hikvision.com
support@hikvision.com

