

DS-K3B211LX
Value Swing Barriers

- 4 pairs of IR light detectors: Permissions validation and anti-tailgating.
- LED light indicates passing direction.
- System will cancel the passing permission if a person does not pass through the lane within the valid passing duration.
- Door remaining open when fire alarm triggered: The door wings will be free status.
- LX version means without built-in access control board and card readers (optional).


▪ Specification

System	
Motor	Brushless motor
MCBF	≥ 3 million times
IR light detectors	4 pairs
Interface	
Network interface	NA
Lock control	NA
Exit button	Main: 2 Sub: 2
Alarm output	NA
RS-485	NA
RS-232	NA
Fire alarm input	1
Capacity	
Card capacity	NA
Event capacity	NA
General	
Throughput	20 to 60 persons per minute The actual throughput is affected by the person passing rate and passing method.
Lane width	550 mm to 900 mm (21.65" to 35.4")
Barrier material	8 mm acrylic glass
Pedestal material	SUS304 stainless steel 0.8 mm
Power consumption	Standby: 30 W Working: 80 W Peak: 120 W
Working temperature	-20 °C to 65 °C (-4 °F to 149 °F)
Working humidity	10% to 95% (No condensing)
Dimensions	Without package: 1200 mm × 218 mm × 1023 mm (47.2" × 8.6" × 40.3") With package: 1300 mm × 320 mm × 1080 mm (51.2" × 12.6" × 42.5")
Weight	Net: Left: 33 kg (72.8 lb) Middle: 43 kg (94.8 lb) Right: 36 kg (79.4 lb) Gross: Left: 56 kg (123.5 lb) Middle: 64 kg (141.1 lb) Right: 60 kg (132.3 lb)
Power supply method	100 to 240 VAC, 50 to 60 Hz
Configuration	
Module selection	YES
Base	YES
Application environment	Indoor and outdoor
Base model	DS-B211X-BASE
Product type	Swing barrier

▪ Available Model

DS-K3B211LX

▪ Dimension

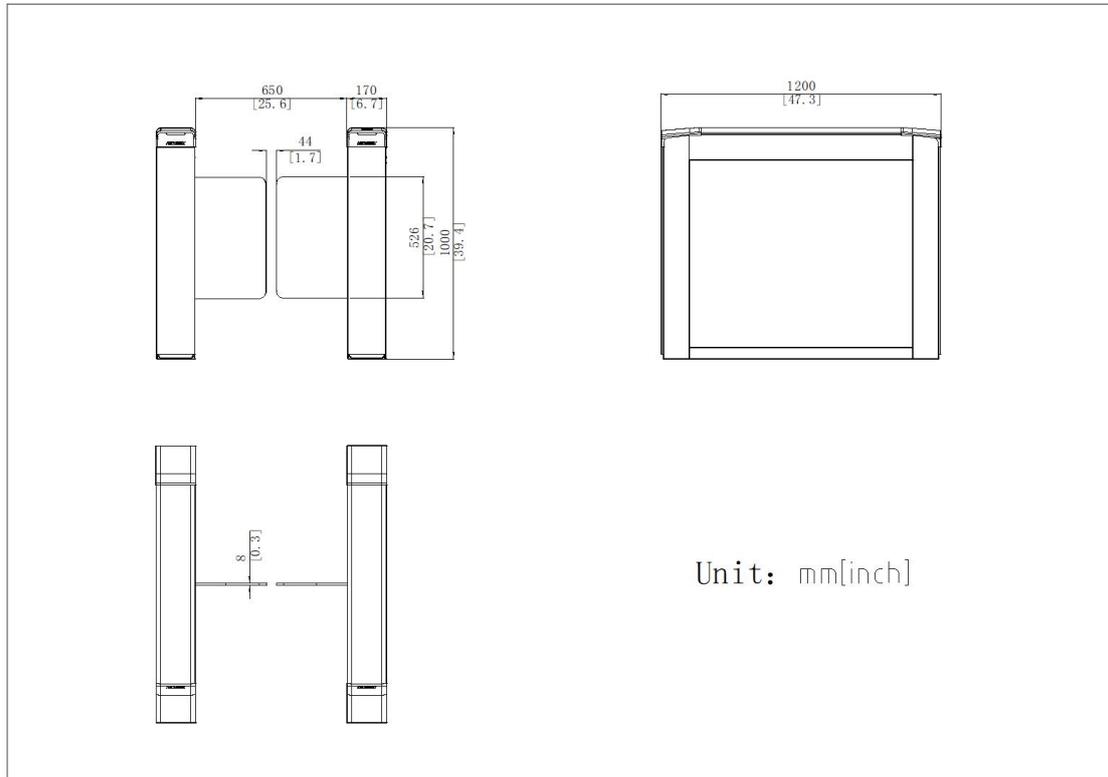

See Far, Go Further



www.hikvision.com
support@hikvision.com

