

## **DS-3K02-14** **Rackmount Chassis for Media Converter**



DS-3K02-14S is a chassis designed to provide centralized management and power supply for 14 units of fiber optical transceivers. Its zero-configuration, plug-and-play architecture simplifies installation, while the integrated 4 kV anti-surge switching power supply design delivers safe, stable, and reliable power output.

- Centralized power management for 14 fiber optical transceivers
- Hot-swappable operation support for each fiber optical transceiver
- Standard 19-inch 2U rack-mountable design


## ▪ Specification

General	
Net Weight	3.04 kg (6.7 lb)
Dimensions (W × H × D)	482.6 mm × 88.0 mm × 245.0 mm (19.0" × 3.46" × 9.65")
Operating Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Power Supply	100~240 V AC, 50/60 Hz, 2.5 A
Installation Mode	Desk-Mounted,Rack (equipped with mounting ears)
Slots	14
Compatible Model	DS-3D501T-A, DS-3D501R-A

## ▪ Available Model

DS-3K02-14

## ▪ Dimension

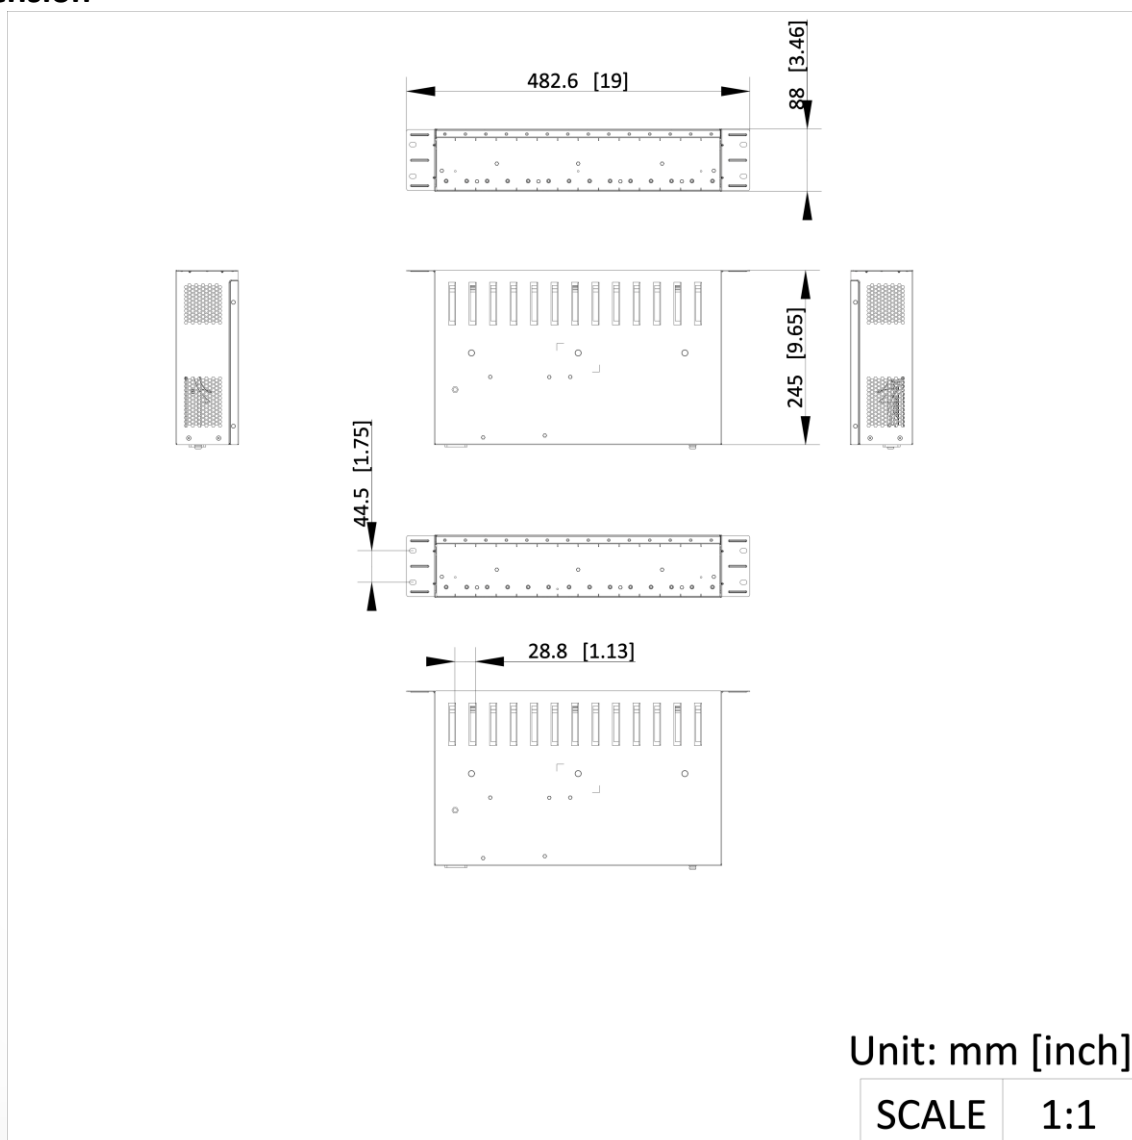

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

