

DS-2CE19KF0T-LXTS 3K Two Way Audio & Siren ColorVu Fixed Bullet Camera



- High quality imaging with 3K, 2960 × 1664 resolution
- 24/7 color imaging with F1.0 aperture
- Smart-Hybrid Light, optimize your security with flexible lighting options
- 3D DNR technology delivers clean and sharp images
- Up to 80 m white light and 80 m IR distance for bright night imaging
- Active strobe light and audio alarm to warn intruders off
- Built-in mic and built-in speaker , high quality audio with audio over coaxial cable
- Provide real-time communication via built-in two-way audio
- Water and dust resistant (IP67)

▪ Specification

Camera	
Image Sensor	3K CMOS
Max. Resolution	2960 (H) × 1664 (V)
Min. Illumination	0.001 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/12.5 s to 1/50,000 s,NTSC: 1/15 s to 1/50,000 s
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°,Tilt: 0° to 90°,Rotate: 0° to 360°
Signal System	PAL/NTSC
Lens	
Lens Type	2.8 mm, 3.6 mm fixed lens
Focal Length & FOV	2.8 mm, horizontal FOV: 105.0°, vertical FOV: 62.5°, diagonal FOV: 129°; 3.6 mm, horizontal FOV: 90.0°, vertical FOV: 50.2°, diagonal FOV: 109° 6 mm, horizontal FOV: 58°, vertical FOV: 31°, diagonal FOV: 68°
Lens Mount	M12
Microphone	
Pickup Distance	In a radius of up to 5 m
Amount	1
Speaker	
Rated Power	2 W
Speaker Range	In a radius of up to 5 m
Illuminator	
Supplement Light Type	Smart,IR,White Light
Supplement Light Range	IR: Up to 80 m,White Light: Up to 80 m
Image	
Image Settings	Anti-banding, Brightness, Sharpness, Smart IR
Frame Rate	TVI: 3K @10 fps/12.5 fps/20 fps/25 fps, 4 MP @25 fps/30 fps, 1080P @25 fps/30 fps
Day/Night Mode	Auto/Color
Wide Dynamic Range (WDR)	Digital WDR
Image Enhancement	DWDR, BLC, HLC, Global
Noise Reduction	3D DNR
White Balance	Auto, Manual
Audio	
Audio Function	Echo Cancellation, AI Noise Reduction, Automatic Gain Control
Interface	
Video Output	1 HD analog output
Alarm	Flashing Light Alarm (Red & Blue)


General	
Power	12 VDC $\pm$ 25%, max. 9.8 W, *You are recommended to use one power adapter to supply the power for one camera. If a high-impedance cable is used (such as the 18 m extension cable in the kit package), an 18 VDC adapter is required.
Material	Main body: Metal; Enclosure: Plastic
Dimension	285.8 mm $\times$ 88.1 mm $\times$ 83.4 mm (11.3" $\times$ 3.5" $\times$ 3.3")
Weight	Approx. 650 g (1.4 lb.)
Operating Condition	-40 $^{\circ}$ C to 60 $^{\circ}$ C (-40 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 90% or less (non-condensing)
Communication	HIKVISION-C
Language	English
Approval	
Protection	IP67

▪ Available Model

DS-2CE19KF0T-LXTS(2.8mm)

DS-2CE19KF0T-LXTS(3.6mm)

▪ Dimension

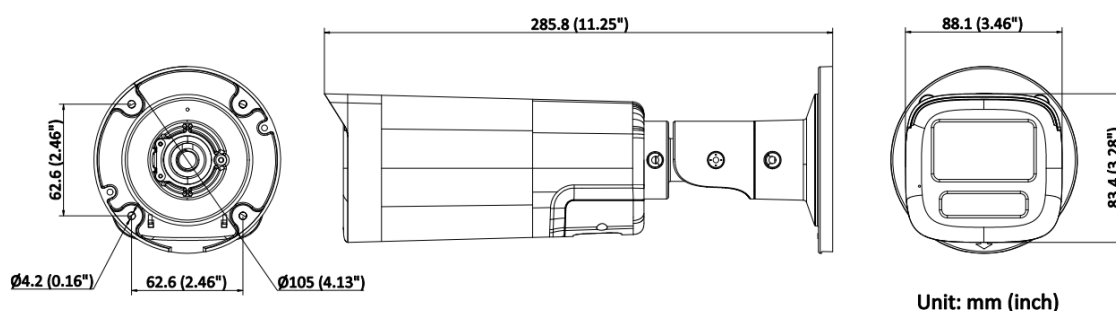


▪ Accessory

▪ Optional

DS-1275ZJ-SUS	DS-1276ZJ-SUS	DS-1280ZJ-XS

▪ Installation Methods

Vertical Pole Mounting	Corner Mounting	Junction Box
DS-1275ZJ-SUS+DS-1280ZJ-XS	DS-1276ZJ-SUS+DS-1280ZJ-XS	DS-1280ZJ-XS

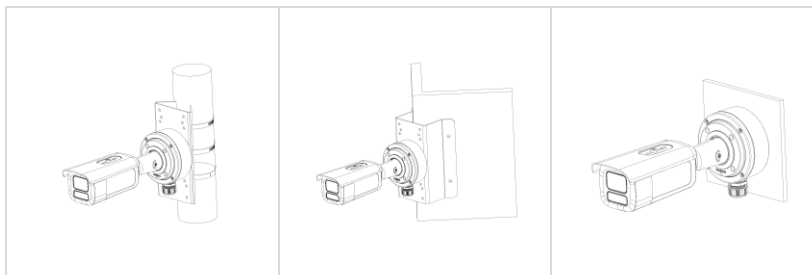

See Far, Go Further



www.hikvision.com
support@hikvision.com

