

DS-2CE72GF0T-LPXTS

2K Two Way Audio & Siren Fixed Turret Camera



- High quality imaging with 2K, 2304 × 1296 resolution
- 24/7 color imaging with F1.0 aperture
- Smart-Hybrid Light, optimize your security with flexible lighting options
- 3D DNR technology delivers clean and sharp images
- Up to 20 m white light and 30 m IR distance for bright night imaging
- Active strobe light and audio alarm to warn intruders off
- Built-in mic and built-in speaker, high quality audio with audio over coaxial cable
- Provide real-time communication via built-in two-way audio
- Water and dust resistant (IP67)

▪ Specification

| Camera | |
|--------------------------|--|
| Image Sensor | 2K CMOS |
| Max. Resolution | 2304 (H) × 1296 (V) |
| Min. Illumination | 0.001 Lux @ (F1.0, AGC ON), 0 Lux with white light |
| Shutter Time | PAL: 1/25 s to 1/50,000 s, NTSC: 1/30 s to 1/50,000 s |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Signal System | PAL/NTSC |
| Lens | |
| Lens Type | 2.8 mm, 3.6 mm fixed lens |
| Focal Length & FOV | 2.8 mm, horizontal FOV: 105°, vertical FOV: 57°, diagonal FOV: 131°; 3.6 mm, horizontal FOV: 88°, vertical FOV: 48°, diagonal FOV: 105° |
| Lens Mount | M12 |
| Microphone | |
| Pickup Distance | In a radius of up to 5 m |
| Amount | 1 |
| Speaker | |
| Rated Power | 2 W |
| Speaker Range | In a radius of up to 5 m |
| Illuminator | |
| Supplement Light Type | Smart, IR, White Light |
| Supplement Light Range | IR: Up to 30 m, White Light: Up to 20 m |
| Image | |
| Image Settings | Anti-banding, Brightness, Sharpness, Smart IR |
| Frame Rate | TVI: 2K @20fps, 1080P @25fps/30fps |
| Day/Night Mode | Auto/Color |
| Wide Dynamic Range (WDR) | Digital WDR |
| Image Enhancement | DWDR, BLC, HLC, Global |
| Noise Reduction | 3D DNR |
| White Balance | Auto, Manual |
| Audio | |
| Audio Function | Echo Cancellation, AI Noise Reduction, Automatic Gain Control |
| Interface | |
| Video Output | 1 HD analog output |
| Alarm | Flashing Light Alarm (Red & Blue) |


| General | |
|---------------------|--|
| Power | 12 VDC \pm 25%, max. 5.9 W, *You are recommended to use one power adapter to supply the power for one camera. |
| Material | Plastic |
| Dimension | \varnothing 110 mm \times 93 mm (\varnothing 4.3" \times 3.7") |
| Weight | Approx. 275 g (0.6 lb.) |
| Operating Condition | -40 °C to 60 °C (-40 °F to 140 °F). Humidity 90% or less (non-condensing) |
| Communication | HIKVISION-C |
| Language | English |
| Approval | |
| Protection | IP67 |

▪ Available Model

DS-2CE72GF0T-LPXTS(2.8mm)

DS-2CE72GF0T-LPXTS(3.6mm)

▪ Dimension

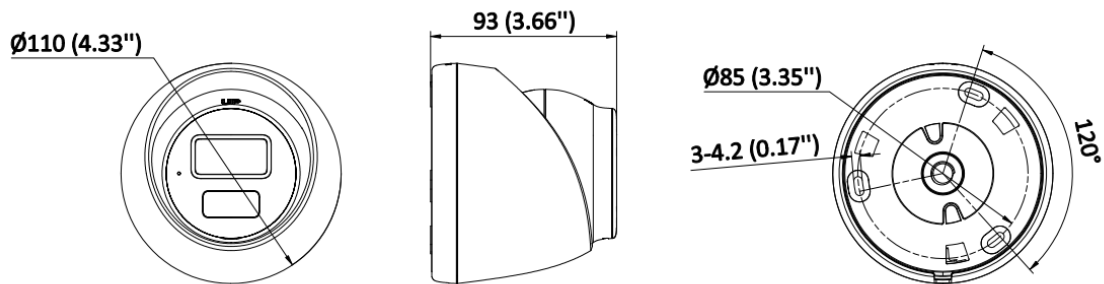

Unit:mm (inch)

▪ Accessory

▪ Optional

| DS-1275ZJ-SUS | DS-1281ZJ-S | DS-1272ZJ-110-TRS | DS-1276ZJ-SUS |
|---------------|-------------|-------------------|---------------|
| | | | |

See Far, Go Further



www.hikvision.com
support@hikvision.com

