


DS-1LN6OFPUPE**CAT6 SF/UTP PE 23AWG Cable****Key Feature**

- Stable electrical performance, compliant with ANSI/TIA-568.2-D, ISO/IEC11801.
- Solid-Bare Copper conductor with less resistance, and better electrical properties and transmission performance.
- Sheath with strong mechanical properties, and high tensile and compressive strength, reducing damage during the project.
- PE jacket, preventing damage from long-term UV sunlight exposure.
- Water-blocking yarn design, to prevent moisture from entering the cable in the wet environment.
- SF/UTP structure, anti-interference, more stable transmission performance.
- Excellent performance in the Fluke 90-meter permanent link test.
- Excellent performance in the Fluke 100-meter channel test while being continuously loaded with 57V/1A DC power (PoE).
- Compliant with RoHS 2.0.

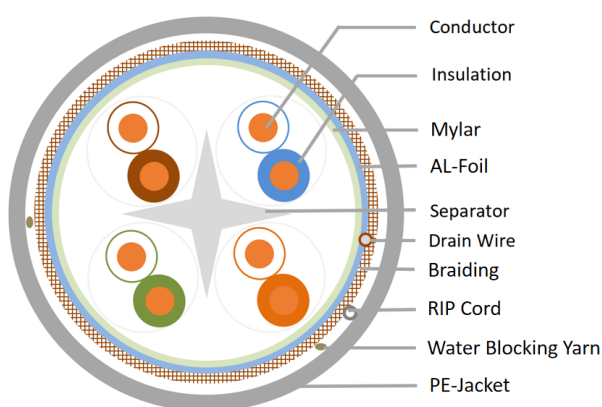

Specification

Model	DS-1LN6OFPUPE	
Category	Cat.6	
Reference standard	ANSI/TIA-568.2-D, ISO/IEC11801, RoHS 2.0	
Fire resistance	CPR Fca	
Conductor	Material	Solid-Bare Copper (99.95%)
	Diameter	0.560 ± 0.005mm (23AWG)
Insulation	Material	HDPE
	Diameter	1.15 ± 0.05mm
Sheath	Thickness	0.50 ± 0.10mm
	Diameter	7.7 ± 0.4mm
	Material	PE
	Color	Black
Rip-cord	Yes	
Separator	Yes	
Shield	Aluminum foil and braided shield	
Water-blocking yarn	Yes	
Sheath properties	Before aging	Tensile strength ≥ 10.0 Mpa Elongation ≥ 350%
	Aging period	100°C × 24h × 7d
	After aging	Tensile strength ≥ 10.0Mpa Elongation ≥ 300%
	Cold bend	-20 ± 2°C × 4h, 8 × cable O.D, no visible cracks
Electrical Characteristics (20°C)	1.0-250.0 MHz impedance	100 ± 15 Ω
	1.0-250.0 MHz delay skew	≤ 45 ns/100 m
	DC resistance	≤ 9.38 Ω/100 m
	DC conductor resistance unbalance	≤ 4.0%
	Package dimension	400 mm × 400 mm × 270 mm
	Weight(with package)	16.9± 0.5kg
	Cable length	305 ± 1.5 m
	Ambient temperature	-40°C to 75°C (-40°F to 167°F)
	Operating voltage	57 V DC

Technical Performance (100 m)

Frequency (MHz)	ATT (20 °C) ≤ (dB)	RL ≥(dB)	NEXT ≥(dB)	PS NEXT ≥(dB)	EL FEXT ≥(dB)	PS EL FEXT ≥(dB)	Phase delay ≤(ns)
1	2.02	20	74.3	72.3	67.8	64.8	570.00
4	3.78	23	65.3	63.3	55.8	52.8	552.00
8	5.32	24.5	60.8	58.8	49.7	46.7	546.73
10	5.95	25	59.3	57.3	47.8	44.8	545.38
16	7.55	25	56.2	54.2	43.7	40.7	543.00
20	8.47	25	54.8	52.8	41.8	38.8	542.05
25	9.51	24.3	53.3	51.3	39.8	36.8	541.20
31.25	10.67	23.6	51.9	49.9	37.9	34.9	540.44
62.5	15.38	21.5	47.7	45.4	31.9	28.9	538.55
100	19.8	20.1	44.3	42.3	27.8	24.8	537.60
200	28.98	18.0	39.8	37.8	21.8	18.8	536.54
250	32.85	17.3	38.3	36.3	19.8	16.8	536.27

Available Model

DS-1LN60FPUPE

See Far, Go Further



www.hikvision.com
support@hikvision.com

