

DS-2CD2123G2-I(S) 2 MP AcuSense Fixed Dome Network Camera



Empowered by deep learning algorithms, Hikvision AcuSense technology brings human and vehicle targets classification alarms to front- and back-end devices. The system focuses on human and vehicle targets, vastly improving alarm efficiency and effectiveness.

- High quality imaging with 2 MP resolution
- Clear imaging against strong backlight due to 120 dB WDR technology
- Efficient H.265+ compression technology
- Focus on human and vehicle targets classification based on deep learning
- -S: audio and alarm interface available
- Water and dust resistant (IP67) and vandal resistant (IK10)

▪ Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	1920 × 1080
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON), B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotate: 0° to 355°
Lens	
Lens Type	Fixed focal lens, 2.8 and 4 mm optional
Focal Length & FOV	2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104°
Lens Mount	M12
Iris Type	Fixed
Aperture	F1.6
Depth of Field	2.8 mm: 1 m to ∞ 4 mm: 1.2 m to ∞
DORI	
DORI	2.8 mm: D: 44 m, O: 17 m, R: 9 m, I: 4 m 4 mm: D: 54 m, O: 21 m, R: 11 m, I: 5 m
Illuminator	
Supplement Light Type	IR
Supplement Light Range	Up to 30 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream	50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360), *Third stream is supported under certain settings.
Video Compression	Main stream: H.265/H.264/H.264+/H.265+ Sub-stream: H.265/H.264/MJPEG Third stream: H.265/H.264
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile, Main Profile, High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR, VBR
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Region of Interest (ROI)	1 fixed region(s) for main stream and sub-stream
Audio	
Audio Compression	-S: G.711/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC
Audio Bit Rate	-S: 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)

Audio Sampling Rate	-S: 8 kHz/16 kHz/32 kHz/44.1 kHz/48 kHz
Environment Noise Filtering	-S: Yes
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface (Profile S, Profile G, Profile T), ISAPI, SDK, ISUP
Smooth Streaming	Yes
User/Host	Up to 32 users 3 user levels: administrator, operator, and user
Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.3, host authentication (MAC address)
Network Storage	NAS (NFS, SMB/CIFS), Auto Network Replenishment (ANR), Together with high-end Hikvision memory card, memory card encryption and health detection are supported.
Client	iVMS-4200, Hik-Connect, Hik-Central
Web Browser	Plug-in required live view: IE 10, IE 11, Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Local service: Chrome 57.0+, Firefox 52.0+
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode, saturation, brightness, contrast, sharpness, gain, white balance, adjustable by client software or web browser
Day/Night Switch	Day, Night, Auto, Schedule
Wide Dynamic Range (WDR)	120 dB
SNR	≥ 52 dB
Image Enhancement	BLC, HLC, 3D DNR
Privacy Mask	Yes
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD card, up to 256 GB
Audio	-S: 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 KΩ, interface type: non-equilibrium; 1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 Ω, interface type: non-equilibrium, mono sound
Alarm	-S: 1 input, 1 output (max. 12 VDC, 30 mA)
Reset Key	Yes
Event	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception
Smart Event	Face detection

Linkage	Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture, trigger alarm output (-S), audible warning (-S)
Deep Learning Function	
Perimeter Protection	Line crossing, intrusion Support alarm triggering by specified target types (human and vehicle)
General	
Power	12 VDC $\pm$ 25%, 0.5 A, max. 6 W, $\varnothing$ 5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, 36 V to 57 V, 0.2 A to 0.15 A, max. 7.5 W
Material	Body: aluminum alloy, bubble: plastic
Dimension	$\varnothing$ 110.8 mm $\times$ 84.7 mm ($\varnothing$ 4.4" $\times$ 3.3")
Package Dimension	134 mm $\times$ 134 mm $\times$ 108 mm (5.3" $\times$ 5.3" $\times$ 4.3")
Weight	Approx. 530 g (1.2 lb.)
With Package Weight	Approx. 720 g (1.6 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	33 languages English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Anti-flicker, heartbeat, mirror, privacy mask, password reset via email, pixel counter
Approval	
EMC	FCC: 47 CFR Part 15, Subpart B, CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015
Safety	UL: UL 62368-1, CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013, IK10: IEC 62262:2002

▪ Typical Application

Level	Description
Top-level protection	Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.
Moderate protection	Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain.

No specific protection

Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

▪ Available Model

DS-2CD2123G2-I(2.8mm)(D)(BLACK)

DS-2CD2123G2-I(4mm)(D)(BLACK)

DS-2CD2123G2-I(2.8mm)(D)

DS-2CD2123G2-I(4mm)(D)

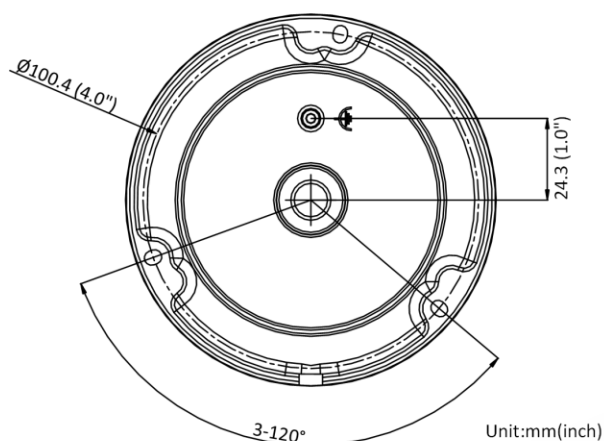
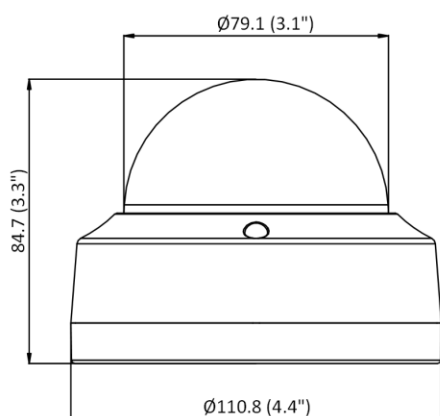
DS-2CD2123G2-IS(2.8mm)(D)(BLACK)

DS-2CD2123G2-IS(4mm)(D)(BLACK)

DS-2CD2123G2-IS(2.8mm)(D)

DS-2CD2123G2-IS(4mm)(D)

▪ Dimension












▪ Accessory












▪ Optional















DS-1250ZJ	DS-1275ZJ-SUS	DS-2210ZJ-WA-110	DS-1280ZJ-DM18	DS-1272ZJ-110B
DS-1271ZJ-110	DS-1258ZJ	DS-2200ZJ-WA-110	DS-2280ZJ-WA110	DS-1272ZJ-110

				
DS-1276ZJ-SUS DS-2200ZJ-WAJ-110 0 DS-1259ZJ				
				

■ Installation Methods

Others DS-1250ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ
				
Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110
				
Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Vertical Pole Mounting DS-1275ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Pendant Mounting DS-2210ZJ-WAJ-110+DS-1259ZJ

				
Pendant Mounting DS-2210ZJ-WA-110	Pendant Mounting DS-1271ZJ-110	Junction Box DS-1280ZJ-DM18	Junction Box DS-2280ZJ-WA110	Wall Mounting DS-1272ZJ-110B+DS-1253ZJ-M
				
Wall Mounting DS-1272ZJ-110B	Wall Mounting DS-1258ZJ	Wall Mounting DS-2200ZJ-WA-110+D S-1259ZJ+DS-1253ZJ-M	Wall Mounting DS-2200ZJ-WA-110+D S-1259ZJ	Wall Mounting DS-2200ZJ-WA-110
				
Wall Mounting DS-2200ZJ-WA-110+D S-1253ZJ-M	Wall Mounting DS-1272ZJ-110+DS-1253ZJ-M	Wall Mounting DS-1272ZJ-110	Wall Mounting DS-2200ZJ-WAJ-110+ DS-1259ZJ+DS-1253ZJ-M	Wall Mounting DS-2200ZJ-WAJ-110+ DS-1259ZJ
				
Wall Mounting DS-2200ZJ-WAJ-110	Wall Mounting DS-2200ZJ-WAJ-110+ DS-1253ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-2200ZJ-WAJ-110+DS-1259ZJ	Corner Mounting DS-1276ZJ-SUS+DS-2200ZJ-WA-110	Corner Mounting DS-1276ZJ-SUS+DS-2200ZJ-WA-110+DS-1259ZJ

				
Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 9ZJ+DS-1253ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110B+DS-1253ZJ -M	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 53ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-22 80ZJ-WA110	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110+DS-1253ZJ- M
				
Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110B	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110+DS-12 59ZJ+DS-1253ZJ-M	Corner Mounting DS-1276ZJ-SUS+DS-12 72ZJ-110	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WAJ-110	Corner Mounting DS-1276ZJ-SUS+DS-22 00ZJ-WA-110+DS-125 3ZJ-M
				
Inclined Ceiling Mounting DS-1259ZJ				
				

See Far, Go Further



www.hikvision.com
support@hikvision.com

