

## DS-2XC3126G0H-LI(S)(U) (PA) 2 MP Smart Hybrid Light Motorized Varifocal Dome Network Camera

ColorVu

DarkFighter 2.5



Hikvision has been dedicated to develop products with security since established. Hikvision always follows security by design principle and has adopted many methods of security technologies into our product development lifecycle, including terminal security, data security, application security, network security, and privacy protection. In the meantime, the security technologies used by Hikvision are all in compliance with local applicable laws and safety regulations. These security measures could enhance product's cyber security protection capability and protect your devices as well as your data from malicious cyber attacks.

- Motorized Pan, Tilt, Rotate, Zoom for easy installation and monitoring
- 24/7 colorful imaging via ColorVu technology
- Smart Hybrid Light: Integrates IR and White lights, 3 supplemental lighting modes
- Clear imaging against strong back light due to 130 dB WDR technology
- Supports Hikvision Embedded Open Platform (HEOP) and importing third party applications
- Supports 1.5 Tops computing power, 150 MB system memory, 371 MB smart RAM, and 1 GB eMMC storage for sharing resources
- -U: Clear two-way audio with dual-array mic
- Water and dust resistant (IP68) and vandal resistant (IK10)
- -S: Audio and alarm interface available
- Anti-corrosion polymer enclosure, protecting cameras to be used in corrosive environments, providing reliability and longevity compared to standard cameras

## ▪ Specification

| Camera                  |                                                                                                                                                                     |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor            | 1/2.8" Progressive Scan CMOS                                                                                                                                        |
| Max. Resolution         | 1920 × 1080                                                                                                                                                         |
| Min. Illumination       | Color: 0.001 Lux @ (F1.2, AGC ON), 0 Lux with light                                                                                                                 |
| Shutter Time            | 1/3 s to 1/100,000 s                                                                                                                                                |
| Day & Night             | IR cut filter                                                                                                                                                       |
| Angle Adjustment        | Remote adjustment (Max. 1000 cycles)<br>Pan: -175° to 175°, tilt: 0° to 85°, rotate: 0° to 350°                                                                     |
| Lens                    |                                                                                                                                                                     |
| Lens Type               | Fixed focal lens, 2.8 and 4 mm optional                                                                                                                             |
| Focal Length & FOV      | 2.8 mm, horizontal FOV 104.6°, vertical FOV 56.4°, diagonal FOV 125.9°<br>4 mm, horizontal FOV 84.3°, vertical FOV 46.1°, diagonal FOV 98.3°                        |
| Lens Mount              | M12                                                                                                                                                                 |
| Iris Type               | Fixed                                                                                                                                                               |
| Aperture                | F1.0                                                                                                                                                                |
| Depth of Field          | 2.8 mm: 1.4 m to ∞<br>4 mm: 1.9 m to ∞                                                                                                                              |
| DORI                    |                                                                                                                                                                     |
| DORI                    | 2.8 mm, D: 43 m, O: 17 m, R: 8 m, I: 4 m<br>4 mm, D: 54 m, O: 21 m, R: 10 m, I: 5 m                                                                                 |
| Illuminator             |                                                                                                                                                                     |
| Supplement Light Type   | IR, White Light                                                                                                                                                     |
| Supplement Light Range  | Up to 40 m                                                                                                                                                          |
| Smart Supplement Light  | Yes                                                                                                                                                                 |
| IR Wavelength           | 850 nm                                                                                                                                                              |
| HEOP                    |                                                                                                                                                                     |
| Open Resources          | Memory: 150 MB,<br>Smart RAM: 371 MB,<br>eMMC: 1 GB                                                                                                                 |
| Computing Power         | 1.5 TOPS                                                                                                                                                            |
| Open Capability         | HEOP 2.0 OpendevSDK                                                                                                                                                 |
| Deep Learning Structure | Caffe, PyTorch, TensorFlow, PaddlePaddle, ONNX                                                                                                                      |
| Programming Language    | C, C++, Go                                                                                                                                                          |
| Video                   |                                                                                                                                                                     |
| Main Stream             | 50 Hz: 50 fps (1920 × 1080, 1280 × 960, 1280 × 720)<br>60 Hz: 60 fps (1920 × 1080, 1280 × 960, 1280 × 720)<br>*High frame rate is supported under certain settings. |
| Sub-Stream              | 50 Hz: 25 fps (704 × 576, 640 × 480)<br>60 Hz: 30 fps (704 × 480, 640 × 480)                                                                                        |
| Third Stream            | 50 Hz: 10 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480)<br>60 Hz: 10 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480)              |
| Fourth Stream           | 50 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)<br>60 Hz: 10 fps (1280 × 720, 640 × 480, 640 × 360)                                                                |

|                             |                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Video Compression           | Main stream: H.265/H.264/H.264+/H.265+,<br>Sub-stream: H.265/H.264/MJPEG,<br>Third stream: H.265/H.264,<br>Fourth stream: H.265/H.264/MJPEG                                                                                                                                                                                                                                           |
| Video Bit Rate              | 32 Kbps to 8 Mbps                                                                                                                                                                                                                                                                                                                                                                     |
| H.264 Type                  | Baseline Profile,Main Profile,High Profile                                                                                                                                                                                                                                                                                                                                            |
| H.265 Type                  | Main Profile                                                                                                                                                                                                                                                                                                                                                                          |
| Bit Rate Control            | CBR,VBR                                                                                                                                                                                                                                                                                                                                                                               |
| Scalable Video Coding (SVC) | H.264 and H.265 encoding                                                                                                                                                                                                                                                                                                                                                              |
| Region of Interest (ROI)    | 5 fixed regions for main stream and sub-stream                                                                                                                                                                                                                                                                                                                                        |
| Target Cropping             | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Audio</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Audio Compression           | -S/-U: G.711ulaw/G.711alaw/G.722.1/G.726/MP2L2/PCM/MP3/AAC-LC                                                                                                                                                                                                                                                                                                                         |
| Audio Bit Rate              | -S/-U: 64 Kbps (G.711ulaw/G.711alaw)/16 Kbps (G.722.1)/16 Kbps (G.726)/32 to 192 Kbps (MP2L2)/8 to 320 Kbps (MP3)/16 to 64 Kbps (AAC-LC)                                                                                                                                                                                                                                              |
| Audio Sampling Rate         | -S/-U: 8 kHz/16 kHz/32 kHz/48 kHz                                                                                                                                                                                                                                                                                                                                                     |
| Environment Noise Filtering | -S/-U: Yes                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Network</b>              |                                                                                                                                                                                                                                                                                                                                                                                       |
| Protocols                   | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv4, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SFTP, ARP, SNMP, WebSocket, WebSockets, SRTP                                                                                                                                                                                                |
| Simultaneous Live View      | Up to 20 channels                                                                                                                                                                                                                                                                                                                                                                     |
| API                         | ONVIF (Profile S, Profile G, Profile T),ISAPI,SDK,ISUP                                                                                                                                                                                                                                                                                                                                |
| User/Host                   | Up to 32 users<br>3 user levels: administrator, operator, and user                                                                                                                                                                                                                                                                                                                    |
| Security                    | Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.1/1.2/1.3, host authentication (MAC address) |
| Network Storage             | NAS (NFS, SMB/CIFS),Auto Network Replenishment (ANR),<br>Together with high-end Hikvision memory card, memory card encryption and health detection are supported.                                                                                                                                                                                                                     |
| Client                      | iVMS-4200,Hik-Connect,Hik-Central                                                                                                                                                                                                                                                                                                                                                     |
| Web Browser                 | Plug-in required live view: IE 10, IE 11,<br>Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Edge 89+, Safari 11+,<br>Local service: Chrome 57.0+, Firefox 52.0+, Edge 89+                                                                                                                                                                                                       |
| <b>Image</b>                |                                                                                                                                                                                                                                                                                                                                                                                       |
| Image Parameters Switch     | Yes                                                                                                                                                                                                                                                                                                                                                                                   |
| Image Settings              | Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,adjustable by client software or web browser                                                                                                                                                                                                                                                                  |
| Day/Night Switch            | Day,Night,Auto,Schedule                                                                                                                                                                                                                                                                                                                                                               |
| Wide Dynamic Range (WDR)    | 130 dB                                                                                                                                                                                                                                                                                                                                                                                |
| Image Enhancement           | BLC,HLC,3D DNR,Defog                                                                                                                                                                                                                                                                                                                                                                  |
| SNR                         | ≥ 52 dB                                                                                                                                                                                                                                                                                                                                                                               |
| Privacy Mask                | 4 programmable polygon privacy masks                                                                                                                                                                                                                                                                                                                                                  |

| Interface                        |                                                                                                                                                                                                                                                                                                                                                       |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ethernet Interface               | 1 RJ45 10 M/100 M self-adaptive Ethernet port                                                                                                                                                                                                                                                                                                         |
| On-Board Storage                 | Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 1 TB,<br>*You are recommended to purchase memory card together with the product if needed. After ordering, the memory card will be installed to product during manufacturing.,<br>The memory card needs to be installed before leaving the factory.                        |
| Built-in Microphone              | -U: Yes, 2 built-in microphones                                                                                                                                                                                                                                                                                                                       |
| Audio                            | -S: 1 input (line in), two-core terminal block, max. input amplitude: 3.3 Vpp, input impedance: 4.7 K $\Omega$ , interface type: non-equilibrium<br>1 output (line out), two-core terminal block, max. output amplitude: 3.3 Vpp, output impedance: 100 $\Omega$ , interface type: non-equilibrium                                                    |
| Alarm                            | -S: 1 input, 1 output (max. 24 VDC/24 VAC, 1 A)                                                                                                                                                                                                                                                                                                       |
| RS-485                           | -S: 1 RS-485 (Half duplex, HIKVISION, Pelco-P, Pelco-D, self-adaptive)                                                                                                                                                                                                                                                                                |
| Reset Key                        | Yes                                                                                                                                                                                                                                                                                                                                                   |
| Power Output                     | 12 VDC, max. 100 mA                                                                                                                                                                                                                                                                                                                                   |
| Event                            |                                                                                                                                                                                                                                                                                                                                                       |
| Basic Event                      | Motion detection (support alarm triggering by specified target types (human and vehicle)), video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error)                                                                                                                                           |
| Smart Event                      | unattended baggage detection, object removal detection, scene change detection, audio exception detection, defocus detection                                                                                                                                                                                                                          |
| Linkage                          | Upload to FTP/NAS/memory card, notify surveillance center, send email, trigger recording, trigger capture, trigger alarm output, audible warning                                                                                                                                                                                                      |
| Deep Learning Function           |                                                                                                                                                                                                                                                                                                                                                       |
| Perimeter Protection             | Line crossing, intrusion, region entrance, region exiting<br>Support alarm triggering by specified target types (human and vehicle)                                                                                                                                                                                                                   |
| General                          |                                                                                                                                                                                                                                                                                                                                                       |
| Power                            | 12 VDC $\pm$ 25%, 1.33 A, max. 16 W, two-core terminal block, reverse polarity protection, PoE: IEEE 802.3at, Class 4, max. 21 W                                                                                                                                                                                                                      |
| Material                         | Base: SMC+ 30%GF, Cover: SMC+ 30%GF, Junction box: Anodized ADC12                                                                                                                                                                                                                                                                                     |
| Dimension                        | $\varnothing$ 154.9 mm $\times$ 128.53 mm ( $\varnothing$ 6.10" $\times$ 5.06")                                                                                                                                                                                                                                                                       |
| Package Dimension                | 206 mm $\times$ 206 mm $\times$ 230 mm (8.1" $\times$ 8.1" $\times$ 9.1")                                                                                                                                                                                                                                                                             |
| Weight                           | Approx. 1280 g (2.8 lb.)                                                                                                                                                                                                                                                                                                                              |
| With Package Weight              | Approx. 2120 g (4.7 lb.)                                                                                                                                                                                                                                                                                                                              |
| Storage Conditions               | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| General Function                 | Heartbeat, anti-banding, mirror, flash log, password reset via email, pixel counter                                                                                                                                                                                                                                                                   |
| Startup and Operating Conditions | -30 $^{\circ}$ C to 60 $^{\circ}$ C (-22 $^{\circ}$ F to 140 $^{\circ}$ F). Humidity 95% or less (non-condensing)                                                                                                                                                                                                                                     |
| Language                         | 33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian |

| Approval    |                                                                                                                                                                                                         |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EMC         | CE-EMC: EN 55032:2015+A1:2020, EN 50130-4:2011+A1:2014, EN IEC 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, RCM: AS/NZS CISPR 32: 2015, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015 |
| Safety      | CB: IEC 62368-1: 2014+A11, CE-LVD: EN 62368-1: 2014/A11: 2017                                                                                                                                           |
| Environment | CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006                                                                                                                              |
| Protection  | IK10: IEC 62262:2002, IP68: IEC 60529-2013                                                                                                                                                              |

## ▪ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

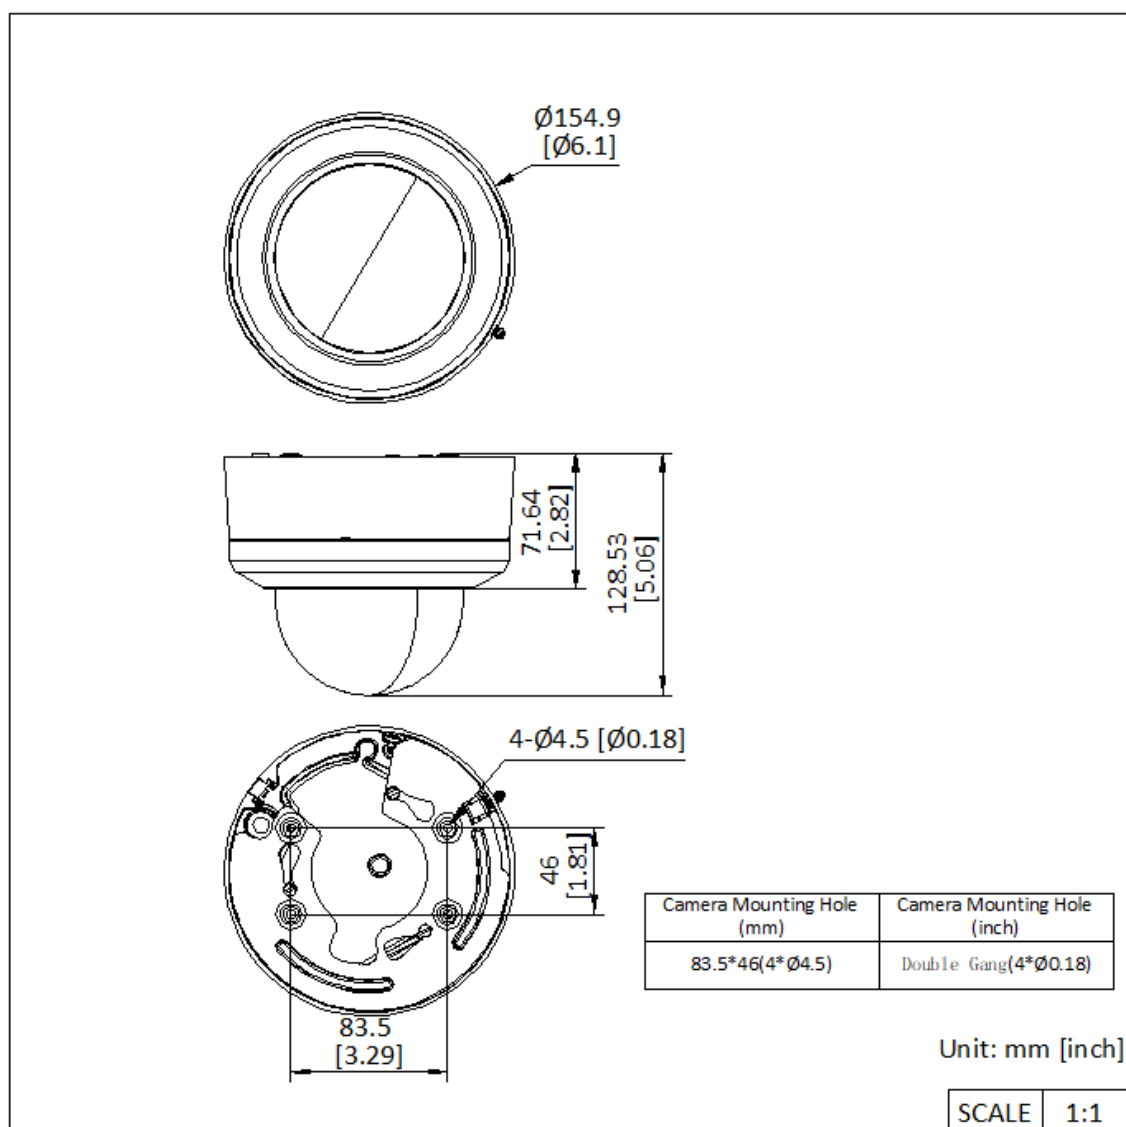
This model has TOP-LEVEL PROTECTION.

| Level                  | Description                                                                                                                                                                                                                                            |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Top-level protection   | Hikvision products at this level are equipped for use in areas where professional anti-corrosion protection is a must. Typical application scenarios include coastlines, docks, chemical plants, and more.                                             |
| Moderate protection    | Hikvision products at this level are equipped for use in areas with moderate anti-corrosion demands. Typical application scenarios include coastal areas about 2 kilometers (1.24 miles) away from coastlines, as well as areas affected by acid rain. |
| No specific protection | Hikvision products at this level are equipped for use in areas where no specific anti-corrosion protection is needed.                                                                                                                                  |

## ▪ Available Model

DS-2XC3126G0H-LISU(PA)(2.8mm)  
DS-2XC3126G0H-LISU(PA)(4mm)  
DS-2XC3126G0H-LIS(PA)(2.8mm)  
DS-2XC3126G0H-LIS(PA)(4mm)  
DS-2XC3126G0H-LI(PA)(2.8mm)  
DS-2XC3126G0H-LI(PA)(4mm)

▪ Dimension




▪ **Accessory**

▪ **Included**




**DS-1280ZJ-DM55**

**-428C-Y**

**Junction Box for  
Polymer  
Anti-corrosion  
Dome**



▪ **Optional**

|                                                                                     |                                                                                     | <b>DS-1473ZJ-155-428<br/>C-Y<br/>Wall Bracket for<br/>Polymer<br/>Anti-corrosion<br/>Dome</b> |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| <b>DS-1475ZJ-Y<br/>Vertical pole mount</b>                                          | <b>DS-1476ZJ-Y<br/>Corner mount</b>                                                 |                                                                                               |
|  |  |           |
|  |  |           |

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

