


DS-QAPS4R15-2 **2.25-inch 150 W Linear Speaker Column**

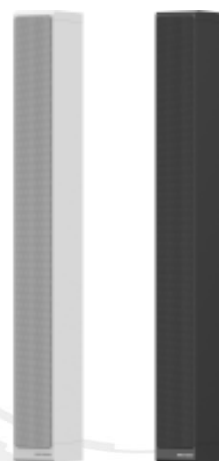

- 150 W rated power
- 12 × 2.25" neodymium magnet driver design
- Sensitivity(1 m, 1 W): 90 dB
- Frequency response: 100 Hz to 18 KHz
- Coverage angle: horizontal dispersion angle: 160°, vertical radiation angle: normal 25°(default), wide 30°
- Maximum sound pressure level: 117 dB @1 m
- 12 speaker units comprise a linear array with a compact layout, forming a vertically directional sound field
- Two color options available: black and white

▪ Specification


Speaker	
Impedance	8 Ω
Rated Power	150 W
Total Harmonic Distortion (THD)	< 5%
Sensitivity(1 m, 1 W)	90 dB @1 m/1 W
Dimension	919 × 95 × 131.3 mm (36.18: × 3.74" × 5.17")
Weight	8.3 kg (18.3 lb.)
Max. Acoustic Pressure	117 dB @1 m
Frequency Response	100 Hz to 18 KHz
Coverage Angle	Horizontal dispersion angle: 160°, vertical radiation angle: normal 25° (default), wide 30°
Interface	
Device Interface	Speakon connector 3-Pin phoenix connector
Audio In	Analog audio signal input
General	
Material	Main body: aluminum alloy Grille: steel
Operating Condition	-10 °C to 50 °C (14 °F to 122 °F)
Package Dimension	1055 × 220 × 255 mm (41.54 × 8.66" × 10.04")
Color	Black/White
Packing List	Device × 1 Regulatory Compliance and Safety Information × 1 Speakon Connector × 1 3-Pin Phoenix Connector × 1 Bracket Component Kit × 1
Installation	Wall Mount

▪ Available Model

DS-QAPS4R15-2

DS-QAPS4R15-2/White

▪ Dimension

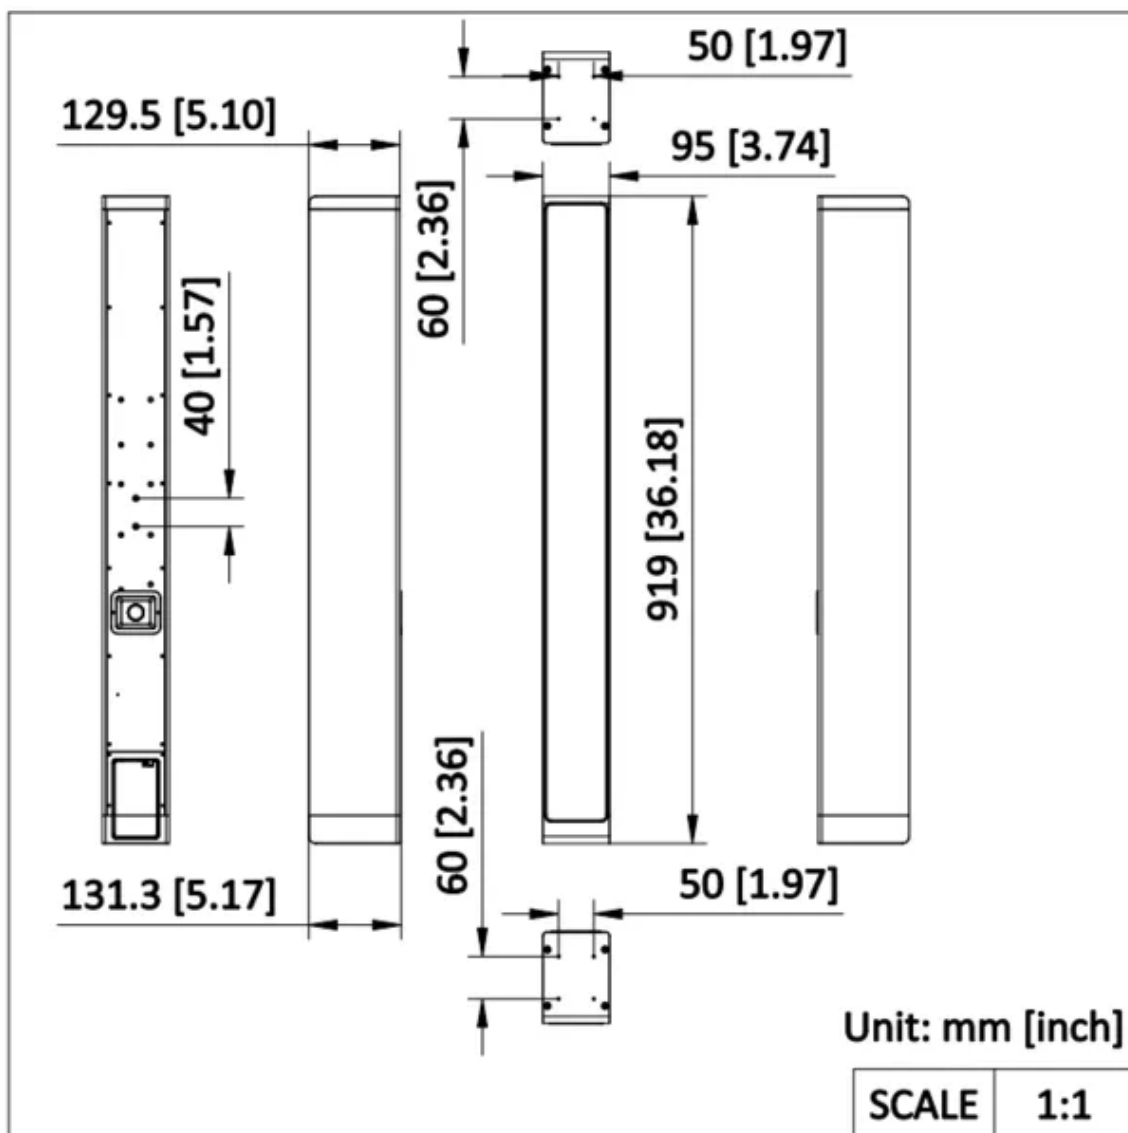

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq