DS-3E1528-SI-24T4F
28 Port Aggregation Switch



Smart managed switches are developed by Hikvision, featuring easy management and maintenance. You can easily deploy, monitor, and expand your video security system anytime and anywhere with our software platforms. You can view the network topology, monitor the health of the network, and receive device alarms in real time, which greatly reduces the cost of network operation and maintenance.


- 24 x gigabit RJ45 port,4 x gigabit fiber optical port
- Support DHCP snooping
- Support 802.1Q VLAN
- Support ACL list
- Support STP/ERPS loop prevention, storm control
- Support ARP Anti-Spoofing
- Support SNMP, QoS
- 6 kV Surge Protection

▪ Specification

General	
Shell	Metal material
Net Weight	2.3 kg (5.07 lb)
Gross Weight	2.82 kg (6.22 lb)
Dimensions (W × H × D)	440 mm × 44 mm × 220.8 mm (17.32”× 1.73”× 8.69'')
Operating Temperature	0°C to 45°C (0 °F to 113 °F)
Storage Temperature	-40 °C to 85 °C (-40 °F to 185 °F)
Operating Humidity	5% to 95% (no condensation)
Relative Humidity	5% to 95% (no condensation)
Power Supply	100-240 V,50/60 Hz,0.7 A Max
Installation Mode	Rack (equipped with mounting ears)
Max. Power Consumption	20 W
Power Consumption in Idle	5 W
Surge Protection	6 kV
Network Parameters	
Ports	24 × gigabit RJ45 port, and 4 × gigabit fiber optical port
MAC Address Table	8 K
Switching Capacity	56 Gbps
Packet Forwarding Rate	41.66 Mpps
Internal Cache	4.1 Mbits
Software Function	
Port Isolation	Ports 1 to 28: port isolation mode to improve network security Ports in an isolation group cannot communicate with each other, but they can communicate with ports outside the isolation group.
Link Aggregation	Link aggregation is used to aggregate multiple physical ports to form a logical port for load balancing, bandwidth expansion, and port protection. Support static link aggregation. Support 8 aggregation groups.
QoS	QoS is used to allocate bandwidth to different services so as to provide end-to-end service quality assurance. Support port-based priority configuration. Support SP, WRR priority schedule mode.
Loop Prevention	Loop prevention is used to prevent the switching network from forming loops, which will seriously affect network communication. Disabled by default. Support 802.1D STP.
VLAN	VLAN is used for network scale planning and network health improvement. Support 802.1Q. Configurable VLAN ID from 1-4094. Support Trunk, Access port mode. Support Max. 4094 VLAN.


HPP	Support one-click activation and remote management via Hik-Partner Pro. Functions supported: 1. Display the port rate. 2. Display the port bandwidth utilization rate. 3. Display the PoE power usage. 4. Display topology information. 5. Display the alarm status. 6. Restart ports and devices. 7. Enable port long-rage mode. 8. Remotely upgrade the device.
System Maintenance	Support device management via web. Support DHCP Client. Enabled by default for dynamic assignment of management IP addresses. Support Super IP, which is a fixed IP address (10.180.190.200) for direct access. Support management via Hik-Central Pro. Support remote management via Hik-Partner Pro. Support cable detection. Abnormal open circuits and short circuits as well as network cable length can be detected. Support 802.1ab LLDP for peer device discovery. Support SNMP v1/v2c/v3 for third-party management platform access. Support port mirroring for fault locating.
Port Rate-Limiting	Port rate-limiting is used for port bandwidth adjustment to prevent network congestion.
Storm Control	Storm control is used to prevent switch ports from being blocked by broadcast or multicast storms in the LAN, which may affect network communication. Support port rate limiting based on broadcast, multicast, and unknown unicast packets.
DHCP Snooping	DHCP Snooping can prevent unauthorized connections to DHCP servers from disrupting the network and affecting normal network communication, and only allow DHCP packets from trusted ports to pass through. Disabled by default.
ACL	Support ACL definitions based on source/destination MAC address, source/destination IP address, IP protocol type. Support ACL application on ports. Support IPv4 ACL and MAC ACL configurations. Support inbound ACLs.
IPSG	IPSG can control the security of port access device. Support port, MAC, IP binding. Support 256 security table entries.
Approval	
EMC	CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020),IC (ICES-003: Issue 7:2020),RCM (AS/NZS CISPR 32: 2015)
Safety	CE-LVD (EN 62368-1: 2014+A11: 2017),CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition)
Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No.1907/2006)

▪ Typical Application

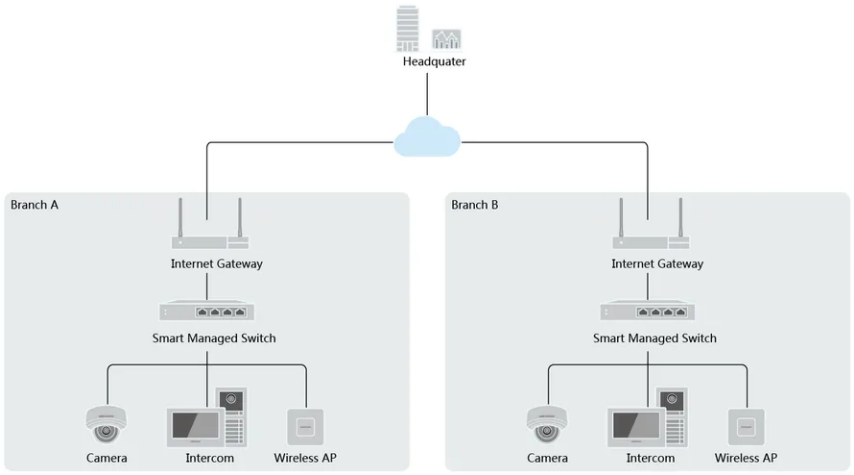

▪ Physical Interface

Front Panel

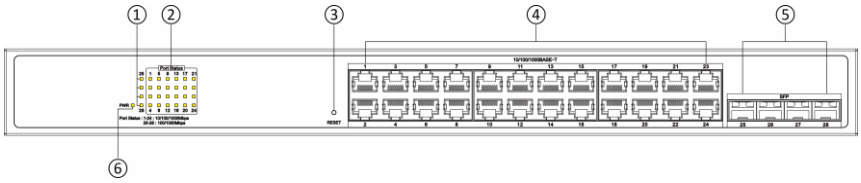


Rear Panel



No.	Indicator/Port	Description
①	Gigabit SFP Fiber Optical Port Indicator (Ports 25 to 28)	● Solid on: The gigabit SFP fiber optical port is connected. ● Flashing: The gigabit SFP fiber optical port is transmitting data. ● Unlit: The gigabit SFP fiber optical port is disconnected or connection is abnormal.
②	Port Status Indicator	● Solid on: The port is connected. ● Flashing: The port is transmitting data. ● Unlit: The port is disconnected or connection is abnormal.
③	Reset Button	Press and hold the reset button for more than 5 seconds to restore all the configurations of the switch to default settings.
④	Gigabit RJ45 Port (Ports 1 to 24)	Used for connection to another device via a network cable.
⑤	Gigabit SFP Fiber Optical Port (Ports 25 to 28)	Used for connection to another device via an optical fiber when plugged into with an optical module.
⑥	PWR Indicator	● Solid on: The switch is powered on normally. ● Unlit: No power supply is connected or power supply is abnormal.
⑦	Grounding Terminal	Used for connection to the grounding cable to protect the switch from lightning.
⑧	Power Supply	Use the attached AC power cord to connect the switch to a power socket.

▪ Dimension

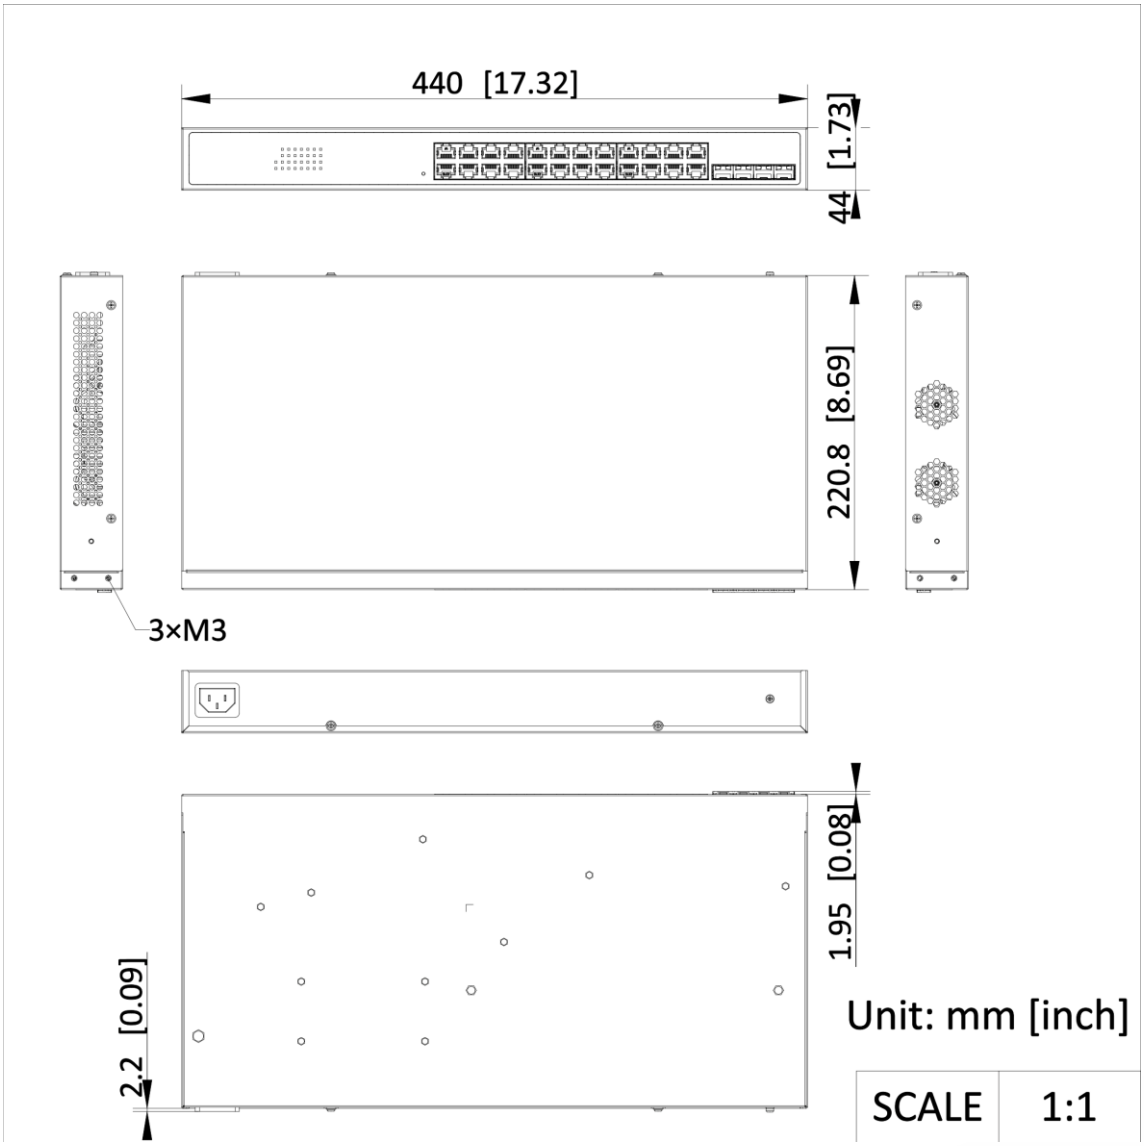
440 [17.32]
44 [1.73]
220.8 [8.69]
3×M3
1.95 [0.08]
2.2 [0.09]
Unit: mm [inch]
SCALE 1:1

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®