

DS-QAEOLM/EN
Loop Speaker Line Monitoring Module



- Connected to DS-QAE0A360G1-V6/EN/DS-QAE0A360G1-V6/ENEX/DS-QAE0A.
- Capable of detecting speaker line faults with high accuracy
- Installed on the end of audio output line of the power amplifier to process detection.


▪ Specification

Audio	
Max. Transmission Distance	1000 meters
Input	2PIN screw terminal used to connect with the output end of below amplifier/speaker devices within communication range1000 meters. DS-QAE0A360G1-V6/EN / DS-QAE0A360G1-V6/ENEX / DS-QAE0A150G1-V/EN / DS-QAE0A300G1-V/EN / DS-QAE0A450G1-V/EN
General	
Dimension	75x58x34 mm
Weight	100 g
Packing List	End Of Line x1;
Operating Temperature	-5°C~45 °C

▪ Available Model

DS-QAEOLM/EN

▪ Dimension

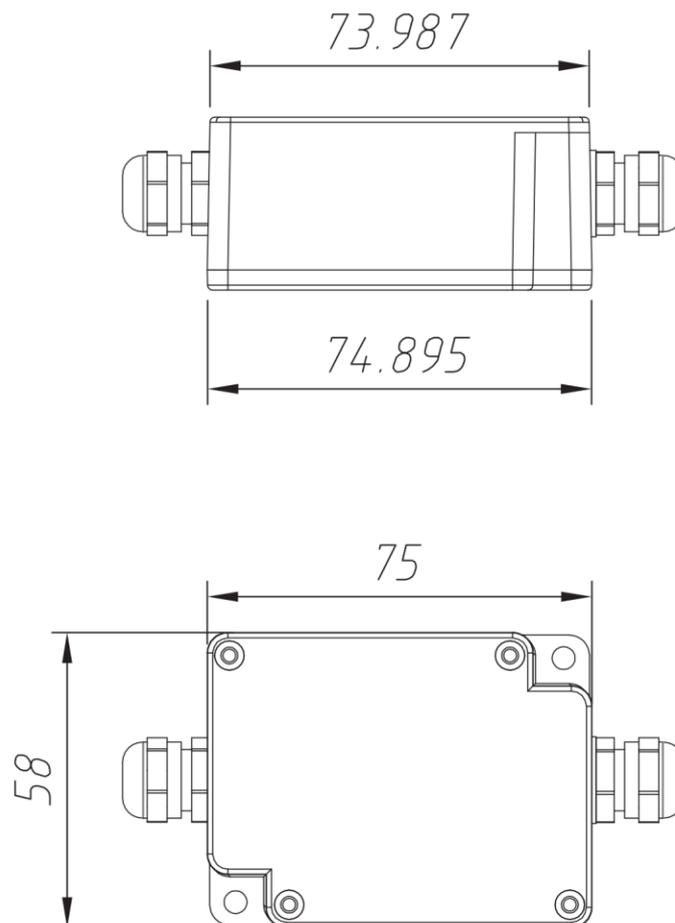

See Far, Go Further



www.hikvision.com
support@hikvision.com

