

DS-2CE10KF3T-E
3K ColorVu PoC Fixed Mini Bullet Camera



- High quality imaging with 3K, 2960 × 1665 resolution
- Excellent low-light performance
- Clear imaging against strong back light due to 130 dB true WDR technology
- 3D DNR technology delivers clean and sharp images
- 2.8 mm and 3.6 mm fixed focal lens
- Up to 20 m white light distance for bright night imaging
- Water and dust resistant (IP67)
- 24/7 color imaging with F1.0 aperture

▪ Specification


Camera	
Image Sensor	1/1.8" 3K CMOS
Signal System	PAL/NTSC
Max. Resolution	2960 (H) × 1665 (V)
Min. Illumination	0.0003 Lux @ (F1.0, AGC ON), 0 Lux with white light
Shutter Time	PAL: 1/25 s to 1/50,000 s; NTSC: 1/30 s to 1/50,000 s
Light Alarm	Solid Light Alarm (White Light)
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Lens	
Lens Type	2.8 mm and 3.6 mm fixed focal lens
Focal Length & FOV	2.8 mm, horizontal FOV: 112°, vertical FOV: 60°, diagonal FOV: 133° 3.6 mm, horizontal FOV: 95°, vertical FOV: 50°, diagonal FOV: 115°
Lens Mount	M16
Image	
Frame Rate	3K@20fps, 4MP@25fps/30fps, 1080p@25fps/30fps
Wide Dynamic Range (WDR)	≥130 dB
White Light	Auto/Off
Image Parameters Switch	STD/HIGH-SAT/HIGHLIGHT
AGC	Yes
Day/Night Mode	Color
White Balance	Auto/Outdoor/Global/Manual
Image Enhancement	WDR, BLC, HLC, Global, HLS
Privacy Mask	4 programmable privacy masks
Noise Reduction	3D DNR/2D DNR
Image Settings	Brightness, Contrast, Mirror, Smart Light, Anti-Banding
Interface	
Video Output	1 HD analog output
Event	
Motion Detection	4 programmable motion areas
General	
Language	English
Operating Condition	-40°C to 60°C (-40°F to 140°F), Humidity: 90% or less (non-condensing)
Power Supply	12 VDC ± 25%/PoC.at *You are recommended to use one power adapter for one camera, and use 2-pin power supply for long-distance power supply.
Consumption	Max. 3.4 W
Material	Metal
White Light Range	Up to 20 m
Communication	HIKVISION-C
Dimension	161.1 mm × 70 mm × 70 mm (6.34" × 2.76" × 2.76")
Weight	Approx. 434 g (0.96 lb.)
Approval	
Protection	IP67

▪ **Available Model**

DS-2CE10KF3T-E(3.6mm)

DS-2CE10KF3T-E(2.8mm)

▪ **Dimension**

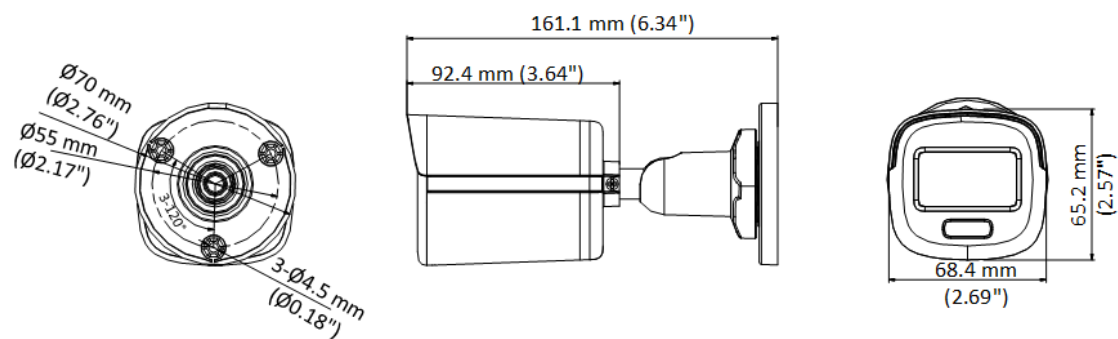

▪ **Accessory**

▪ **Optional**

DS-1280ZJ-XS



See Far, Go Further



www.hikvision.com
support@hikvision.com

