

## DVR-232G-M2 TURBO HD DVR

### Key Feature

- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 18-ch IP camera inputs (up to 5 MP)
- Up to 1080p Lite@15 fps encoding capability
- Max. 1200 m for 720p HDTVI signal



### Smart Function

- Deep learning-based motion detection 2.0

### Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Support 1080p Lite of all channels. When 1080p Lite is on, the image effect is similar with 1080p

### Storage and Playback

- 2 SATA interfaces (up to 10 TB capacity)
- Smart search for efficient playback

### Network & Ethernet Access


- HiLookVision & DDNS (Dynamic Domain Name System) for easy network management

## ▪ Specification

<b>Motion Detection 2.0</b>	
Human/Vehicle Analysis	<p>Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights;</p> <p>Quick search by object or event type is supported;</p>
<b>Recording</b>	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	1080p lite/720p/720p lite/WD1/4CIF/VGA/CIF
Frame Rate	<p>Main stream:</p> <p>For 1080p stream access: 1080p lite/720p lite/WD1/4CIF/VGA@15fps; CIF@25fps</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA@15fps; CIF@25fps</p> <p>For standard definition stream access: WD1/4CIF/VGA/CIF@25fps</p> <p>Sub-stream: CIF/QVGA@15fps</p>
Video Bitrate	32 Kbps to 4 Mbps
Dual-stream	Nonsupport
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
<b>Video and Audio</b>	
IP Video Input	<p>2-ch (up to 18-ch)</p> <p>Up to 5 MP resolution</p> <p>Support H.265+/H.265/H.264+/H.264 IP cameras</p>
Analog Video Input	<p>32-ch</p> <p>BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection</p>
HDTVI Input	1080p25, 1080p30, 720p25, 720p30
AHD Input	1080p25, 1080p30, 720p25, 720p30
HDCVI Input	1080p25, 1080p30, 720p25, 720p30
CVBS Input	PAL/NTSC
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
HDMI Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz
Audio Input	<p>1-ch, RCA (2.0 Vp-p, 1 KΩ)</p> <p>32-ch via coaxial cable</p>
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)
Synchronous playback	16-ch

CVBS Output	1-ch, BNC (1.0 Vp-p, 75 Ω)
<b>Network</b>	
Remote Connection	128
Network Protocol	TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, EHome
Total Bandwidth	128 Mbps
Network Interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
Wi-Fi	Connectable to Wi-Fi network by Wi-Fi dongle through USB interface
<b>Auxiliary Interface</b>	
Serial Interface	RS-485 (half-duplex)
SATA	2 SATA interface
Capacity	Up to 10 TB capacity for each disk
USB Interface	Front panel: 1 × USB 2.0 Rear panel: 1 × USB 3.0
<b>General</b>	
Power Supply	12 VDC, 3.33 A
Consumption	≤ 18 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	380 × 320 × 48 mm (10.2 × 8.7 × 1.8 inch)
Weight	≤ 2.2 kg (without HDD, 4.9 lb.)

## Physical Interface

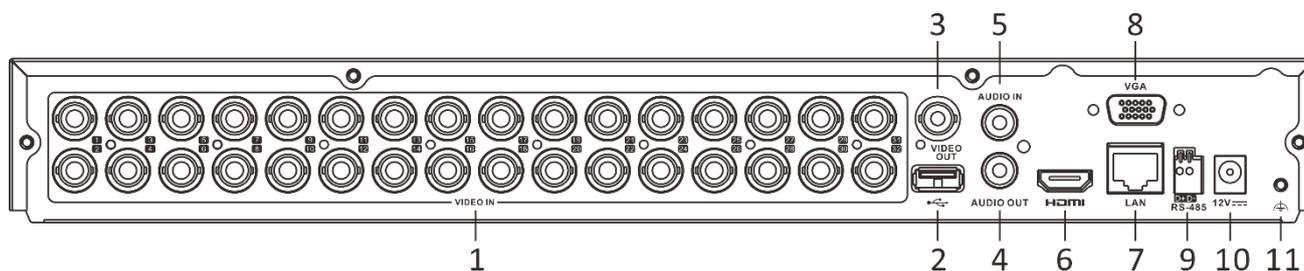

No.	Description	No.	Description
1	VIDEO IN	7	LAN network interface
2	USB interface	8	VGA interface
3	VIDEO OUT	9	RS-485 interface
4	AUDIO OUT, RCA connector	10	12 VDC power supply
5	AUDIO IN, RCA connector	11	GND
6	HDMI interface		

## Available Model

DVR-232G-M2



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998

Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq