

DS-TMG520/B**Barrier gates with straight boom pole and arrow indicator**

DS-TMG52X series barrier gate is applicable to entrance and exit management. It is widely used in road toll station, parking lot, community, enterprise entrance and exit, etc. to manage the entering and exiting of vehicles and record vehicle passing times. It can be controlled automatically via parking lot management system, or via handle, remote controller, buttons, etc.

- DC frequency conversion. The rising and falling speeds can be adjusted independently. The boom pole can rise in high speed to let the vehicle pass quickly.
- The boom pole can fall in low speed to avoid hitting vehicle and pedestrian.
- High protection level. The chassis is produced with 2 mm cold rolled steel sheets in numerically-controlled precision. The surface is coated with plastic powder which is anti-UV, antistatic, non-peeling, and non-fading. The dustproof and waterproof level conforms to IP54.
- Multiple control modes. Rising priority. The boom pole can be controlled via relay, remote controller, and software command.
- Multiple anti-hitting modes via induction, IR, pressure wave, etc.
- The boom pole direction is adjustable from left to right, or from right to left.
- Anti-condensation. The electric motor is in low consumption even when the barrier gate is not in working status, which will keep the motor in normal temperature. So even in cold weather, the lube will not be frozen to guarantee the normal running of barrier gate.
- Auto lock. Even when the power is cut off, you can use tool to keep the barrier gate working.
- Intergated with arrow indicator to show barrier gate status


▪ Specification

Barrier Housing	
Barrier Housing Material	SGCC
Barrier Housing Thickness	2.0 mm
Barrier Housing Door Thickness	1.5 mm
Barrier Housing Color	Orange red
Boom Pole Installation Height	880 mm
Body Indicators	Arrow Indicator
Barrier Gate General	
Matched Boom Pole Type	Cylinder boom pole: 1 to 4 m anti-collision Octagonal straight boom pole: 1 to 6 m Octagonal telescopic boom pole: 4 to 6 m Boom pole ≥ 5 m: with spindle rod
Boom Pole Direction	right by default, direction switchable
Boom Pole Falling Delay	10 s by default (configurable), min. 10 s (every 10 s followed a gap)
Number of Cycles	5000000
Motor Type	DC brushless motor
Working Voltage	220 VAC
Remote Controller Frequency	433 MHz
Current	Max. 4 A
Consumption	300 W
Temperature and Humidity	Temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Rising Boom Pole for Poweroff	Optional, not supported by default
Barrier Gate	
Duty Cycle	100%
Interface	
Rising to Limit	1 group
Falling to Limit	1 group
Open	1 group
Close	1 group
Stop	1 group
IR/Inductive Loop/Radar	1 group
RS-485	1 group
Traffic Signal Light	1 group, external power supply required, max. 220 VAC supported
LED Indicators	1 group
Network	1 group (reserved)
Boom Pole	
Boom Pole Type	Octagonal Straight Pole
Boom Pole Material	AL6061
Boom Pole Color	White background with red bar

<p>Boom Pole Dimensions</p>	<p>2 m octagonal straight boom pole: 98 × 45 × 2000 mm (3.86 × 1.77 × 78.74 inch) 3 m octagonal straight boom pole: 98 × 45 × 3000 mm (3.86 × 1.77 × 118.11 inch) 4 m octagonal straight boom pole: 98 × 45 × 4000 mm (3.86 × 1.77 × 157.48 inch) 5 m octagonal straight boom pole: 119 × 55 × 5000 mm (4.69 × 2.17 × 196.85 inch) 6 m octagonal straight boom pole: 119 × 55 × 6000 mm (4.69 × 2.17 × 236.22 inch) 3 m boom pole with LED strip light: 95 × 49 × 3013 mm (3.74 × 1.93 × 118.62 inch) 4 m boom pole with LED strip light: 95 × 49 × 4013 mm (3.74 × 1.93 × 157.99 inch) 4 m octagonal telescopic boom pole: 110 × 44 × 2970 mm (4.33 × 1.73 × 116.93 inch) 5 m octagonal telescopic boom pole: 110 × 44 × 3470 mm (4.33 × 1.73 × 136.61 inch) 6 m octagonal telescopic boom pole: 110 × 44 × 6000 mm (4.33 × 1.73 × 236.22 inch) 2 m anti-collision cylinder boom pole: 80 × 80 × 2000 mm (3.15 × 3.15 × 78.74 inch) 3 m anti-collision cylinder boom pole: 80 × 80 × 3000 mm (3.15 × 3.15 × 118.11 inch) 4 m anti-collision cylinder boom pole: 80 × 80 × 4000 mm (3.15 × 3.15 × 157.48 inch)</p>
<p>Boom Pole Weight</p>	<p>2 m octagonal straight boom pole: 2.5 ± 0.3 kg (5.51 ± 0.66 lb.) 3 m octagonal straight boom pole: 2.8 ± 0.3 kg (6.17 ± 0.66 lb.) 4 m octagonal straight boom pole: 3.45 ± 0.3 kg (7.60 ± 0.66 lb.) 5 m octagonal straight boom pole: 5.9 ± 0.3 kg (13.00 ± 0.66 lb.) 6 m octagonal straight boom pole: 6.8 ± 0.3 kg (15.21 ± 0.66 lb.) 3 m boom pole with LED strip light: 3.4 ± 0.3 kg (7.50 ± 0.66 lb.) 4 m boom pole with LED strip light: 4.4 ± 0.3 kg (9.70 ± 0.66 lb.) 4 m octagonal telescopic boom pole: 4.42 ± 0.3 kg (9.74 ± 0.66 lb.) 5 m octagonal telescopic boom pole: 4.85 ± 0.3 kg (10.69 ± 0.66 lb.) 6 m octagonal telescopic boom pole: 5.65 ± 0.3 kg (12.46 ± 0.66 lb.) 2 m anti-collision round boom pole: 2.5 ± 0.3 kg (5.51 ± 0.66 lb.) 3 m anti-collision round boom pole: 3.5 ± 0.3 kg (7.71 ± 0.66 lb.) 4 m anti-collision round boom pole: 4.5 ± 0.3 kg (9.92 ± 0.66 lb.)</p>
<p>Boom Pole Dimensions (with Package)</p>	<p>2 m octagonal straight boom pole: 115 × 60 × 2020 mm (4.53 × 2.36 × 79.53 inch) 3 m octagonal straight boom pole: 115 × 60 × 3020 mm (4.53 × 2.36 × 118.90 inch) 4 m octagonal straight boom pole: 115 × 60 × 4020 mm (4.53 × 2.36 × 158.27 inch) 5 m octagonal straight boom pole: 140 × 65 × 5030 mm (5.51 × 2.56 × 198.03 inch) 6 m octagonal straight boom pole: 140 × 65 × 6030 mm (5.51 × 2.56 × 237.40 inch) 3 m boom pole with LED strip light: 100 × 60 × 3035 mm (3.94 × 2.36 × 120.07 inch) 4 m boom pole with LED strip light: 100 × 60 × 4035 mm (3.94 × 2.36 × 159.45 inch) 4 m octagonal telescopic boom pole: 120 × 51 × 3100 mm (4.72 × 2.01 × 122.05 inch) 5 m octagonal telescopic boom pole: 120 × 51 × 3500 mm (4.72 × 2.01 × 137.80 inch) 6 m octagonal telescopic boom pole: 120 × 51 × 4005 mm (4.72 × 2.01 × 157.68 inch) 2 m anti-collision round boom pole: 90 × 90 × 2030 mm (3.54 × 3.54 × 79.92 inch) 3 m anti-collision round boom pole: 90 × 90 × 3030 mm (3.54 × 3.54 × 119.29 inch) 4 m anti-collision round boom pole: 90 × 90 × 4030 mm (3.54 × 3.54 × 158.66 inch)</p>

<p>Boom Pole Weight (with Package)</p>	<p>2 m octagonal straight boom pole: 2.37 ± 0.3 kg (5.22 ± 0.66 lb.) 3 m octagonal straight boom pole: 3.11 ± 0.3 kg (6.86 ± 0.66 lb.) 4 m octagonal straight boom pole: 3.965 ± 0.3 kg (8.74 ± 0.66 lb.) 5 m octagonal straight boom pole: 7.01 ± 0.3 kg (15.45 ± 0.66 lb.) 6 m octagonal straight boom pole: 8.245 ± 0.3 kg (18.18 ± 0.66 lb.) 3 m boom pole with LED strip light: 4.0 ± 0.3 kg (8.82 ± 0.66 lb.) 4 m boom pole with LED strip lioght: 5.2 ± 0.3 kg (11.46 ± 0.66 lb.) 4 m octagonal telescopic boom pole: 5.11 ± 0.3 kg (11.27 ± 0.66 lb.) 5 m octagonal telescopic boom pole: 6.23 ± 0.3 kg (13.73 ± 0.66 lb.) 6 m octagonal telescopic boom pole: 7.25 ± 0.3 kg (15.98 ± 0.66 lb.) 2 m anti-collision round boom pole: 2.7 ± 0.3 kg (5.95 ± 0.66 lb.) 3 m anti-collision round boom pole: 4.3 ± 0.3 kg (9.48 ± 0.66 lb.) 4 m anti-collision round boom pole: 5.8 ± 0.3 kg (12.79 ± 0.66 lb.)</p>
<p>Approval</p>	
<p>RF</p>	<p>CE-RED EN 300220-1 V3.1.1 EN 300220-2 V3.1.1 EN 301489-1 V2.2.3 EN 301489-3 V2.1.1 EN IEC 62311: 2020</p>
<p>EMC</p>	<p>CE-EMC: EN 55032: 2015 + A11: 2020 + A1: 2020, EN IEC 61000-3-2: 2019 + A1: 2021, EN 61000-3-3: 2013 + A1: 2019 + A2: 2021, EN 50130-4: 2011 + A1: 2014</p>
<p>Security</p>	<p>CE-LVD: EN 62368-1: 2014 + A11: 2017 CB: IEC 62368-1: 2014 IEC 62368-1: 2018</p>
<p>Environment</p>	<p>ROHS</p>
<p>Protection</p>	<p>IP54</p>
<p>Package</p>	
<p>Barrier Housing Dimensions (L × W × H)</p>	<p>1248 × 486 × 480 mm (49.1 × 19.1 × 18.9 inch)</p>
<p>Body Weight</p>	<p>59.3 ± 5 kg (130.7 ± 11.0 lb.)</p>
<p>Body Dimensions (with Package, Without Boom Pole) (L × W × H)</p>	<p>1266 × 504 × 626 mm (49.84 × 19.84 × 24.65 inch)</p>

▪ **Dimension**

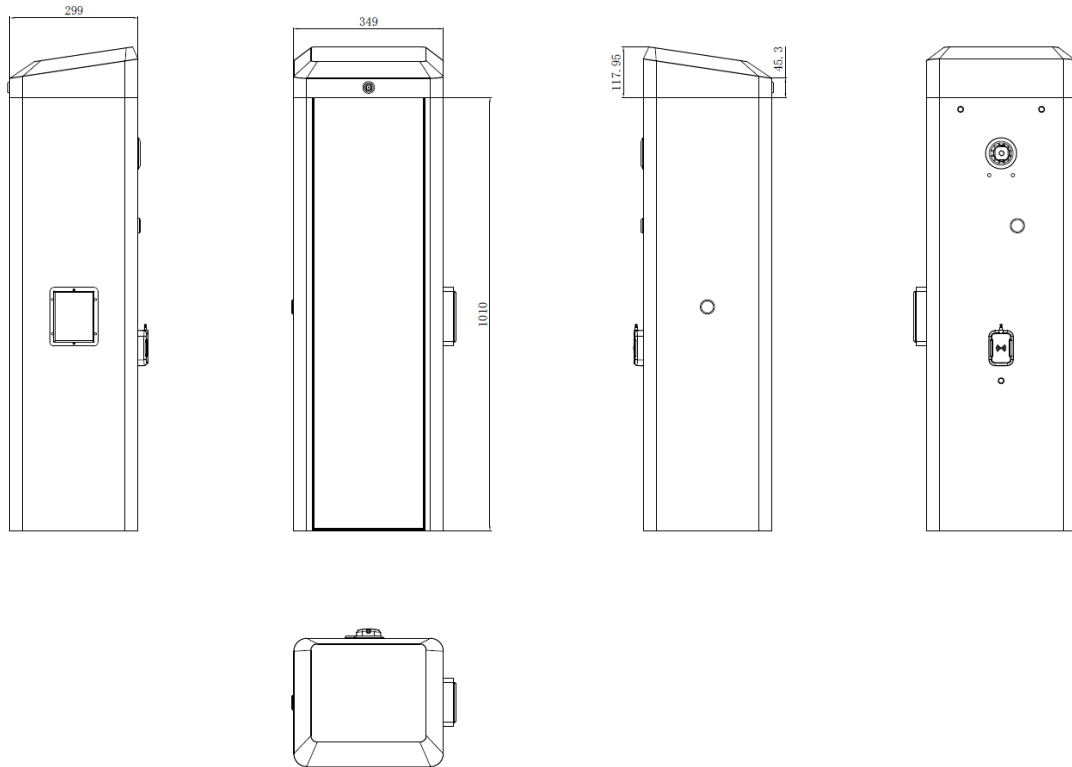

▪ **Accessory**

▪ **Included**

DS-TMG070/52	DS-TMG050	DS-TMG012-5	DS-TMG001-5

▪ **Optional**

DS-TMG013-5	DS-TMG120 (barrier)	DS-TMG012-A1	EEBracket-L800-100 0(barrier)	TMG080-3
DS-TMG060-52				



See Far, Go Further



www.hikvision.com
support@hikvision.com

