

DS-K1T808EFX **Pro Fingerprint Terminals**



Access control terminal adopts deep learning algorithm, which helps supports multiple authentication modes: card/fingerprint/PIN authentication, etc. It can be applied in multiple scenarios, such as buildings, enterprises, financial industries, and other important areas.

- 2.4-inch LCD screen
- Multiple authentication methods, including fingerprint, card (EM card), and PIN, etc.
- Max. 3000 cards, 3000 fingerprints and 100,000 events
- Supports ISAPI and ISUP 5.0 protocols
- Configuration via the PC web client and mobile web client
- Supports wiring with secure door control unit or card reader via RS-485
- Supports access control and local time and attendance function


▪ Specification

Display	
Screen size	2.4 inch
Type	LCD
Network	
Wired network	Support
Interface	
Network interface	1 RJ-45, 10/100 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand(Hik 26bit,Hik 34bit)
USB	1
Authentication	
Card type	EM card
Fingerprint module	Optical fingerprint module
Fingerprint comparing mode	1:1 and 1:N
General	
Power supply	12 VDC
Power consumption	≤ 6 W
Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working humidity	0% to 90% (No condensing)
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil), Korean, Japanese
Keypad	Support

▪ Available Model

DS-K1T808EFX

▪ Dimension

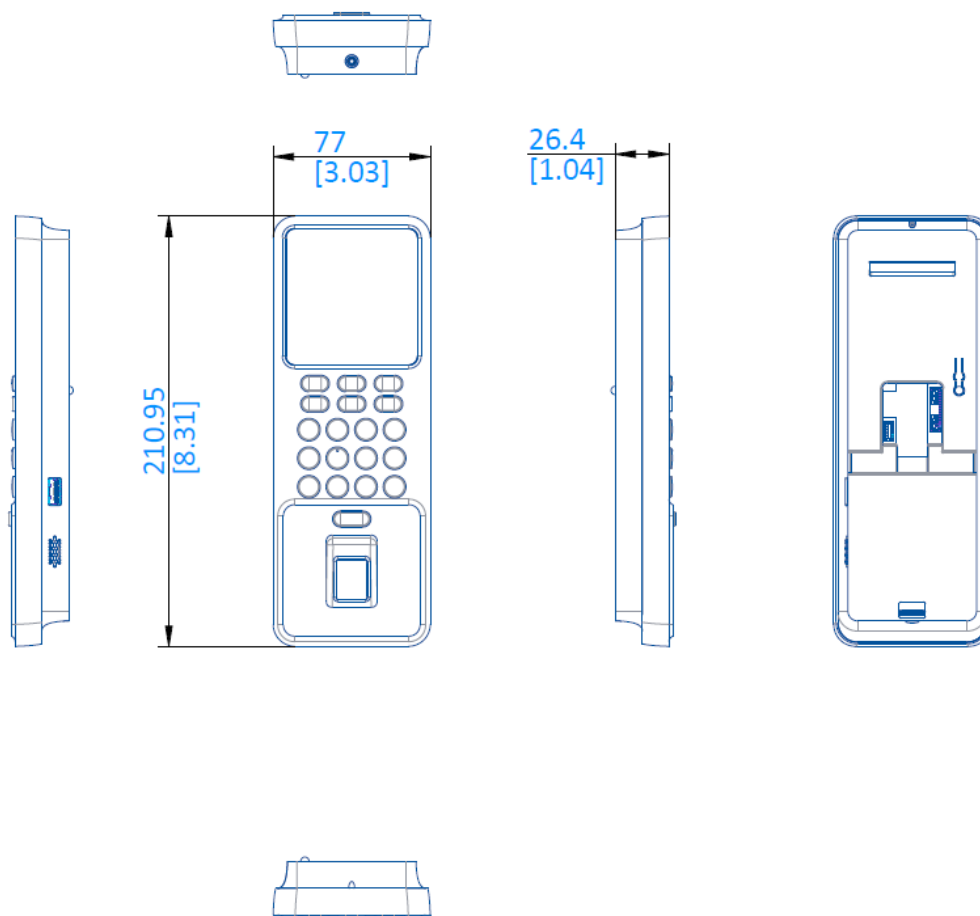

Unit: mm [inch]

SCALE	1:1
-------	-----

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq