

DVR-116G-M1/T**▪ Key Feature**


- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- H.265 Pro+/H.265 Pro/H.265 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 18-ch IP camera input (up to 5 MP)
- Up to 1080p Lite@15 fps encoding capability
- Support all channels HDTVI two-way audio technology

▪ Specification

Motion Detection 2.0	
Human/Vehicle Analysis	<p>Deep learning-based motion detection 2.0 is enabled by default for all analog channels, it can classify human and vehicle, and extremely reduce false alarms caused by objects like leaves and lights;</p> <p>Quick search by object or event type is supported;</p>
Video and Audio	
IP Video Input	<p>2-ch (up to 18-ch)</p> <p>Up to 5 MP resolution</p> <p>Support H.265+/H.265/H.264+/H.264 IP cameras</p>
Analog Video Input	<p>16-ch</p> <p>BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection</p>
HDTVI Input	1080p25, 1080p30, 720p25, 720p30
AHD Input	1080p25, 1080p30, 720p25, 720p30
HDCVI Input	1080p25, 1080p30, 720p25, 720p30
CVBS Input	PAL/NTSC
HDMI Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Video Output Mode	HDMI/VGA simultaneous output
Audio Input	<p>1-ch RCA (2.0 Vp-p, 1 KΩ)</p> <p>16-ch via coaxial cable</p>
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using the first audio input)
Synchronous Playback	16-ch
Recording	
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264
Encoding Resolution	<p>For 1080p stream access: 1080p Lite/720p Lite/WD1/4CIF/VGA/CIF</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF</p> <p>For SD stream access: WD1/4CIF/VGA/CIF</p>
Frame Rate	<p>Main stream:</p> <p>For 1080p stream access: 1080p Lite/720p Lite/WD1/4CIF/VGA/CIF@15 fps</p> <p>For 720p stream access: 720p/WD1/4CIF/VGA/CIF@15 fps</p> <p>For SD stream access: WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)</p> <p>Sub-stream:</p> <p>For 1080p and 720p stream access CIF/QVGA@15 fps</p> <p>For SD stream access: CIF/QVGA@25 fps (P)/30 fps (N)</p>
Video Bitrate	32 Kbps to 4 Mbps
Dual-stream	Support
Stream Type	Video, Video & Audio
Audio Compression	G.711u
Audio Bitrate	64 Kbps
Network	
Total Bandwidth	96 Mbps
Network Protocol	TCP/IP, PPPoE, DHCP, HiLookVision, DNS, DDNS, NTP, SADP, SMTP, UPnP™, HTTPS
Remote Connection	128
Network Interface	1, RJ45 10/100 Mbps self-adaptive Ethernet interface

Auxiliary Interface	
SATA	1, SATA interface
Capacity	Up to 6 TB capacity for each disk
USB Interface	2 × USB 2.0
General	
Power Supply	12 VDC, 1.6 A
Consumption	≤ 7 W (without HDD)
Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
Working Humidity	10% to 90%
Dimension (W × D × H)	285 × 210 × 48 mm (11.2 × 8.3 × 1.9 inch)
Weight	≤ 1.8 kg (without HDD, 4.0 lb.)

Physical Interface

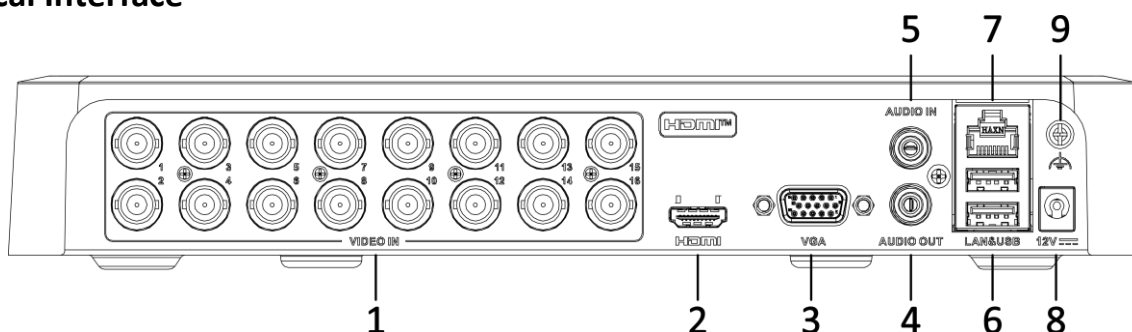


No.	Description	No.	Description
1	Video and coaxial audio in	6	USB interface
2	HDMI interface	7	LAN network interface
3	VGA interface	8	12 VDC power input
4	AUDIO OUT	9	GND
5	AUDIO IN		

Available Model

HL-DVR-116G-M1/T

Dimension

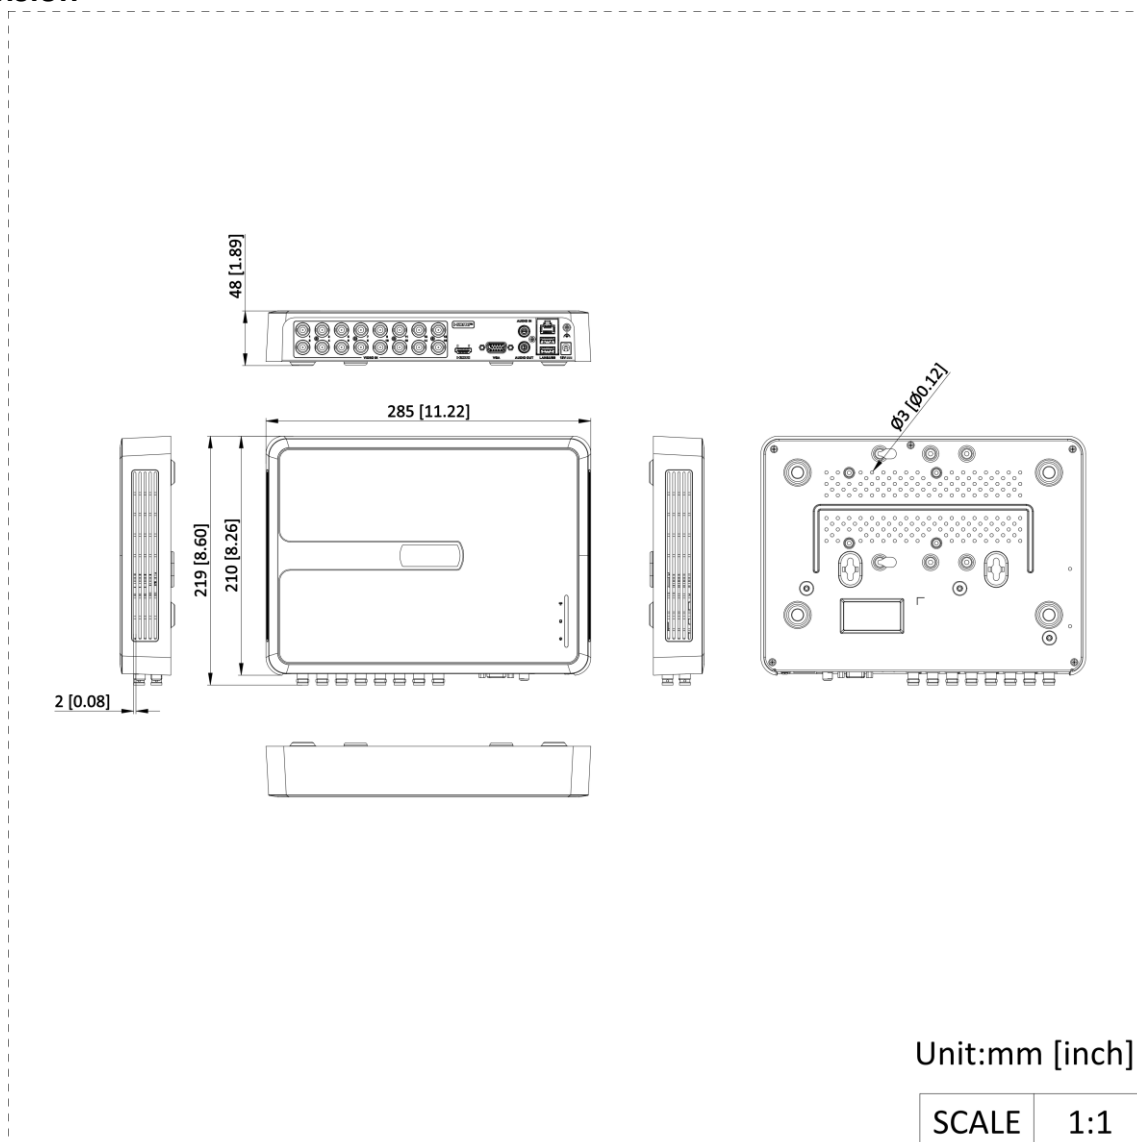

See Far, Go Further



www.hikvision.com
support@hikvision.com

