

DS-2C
2 MP

AcuSense



Empowered by deep learning algorithms, Hikvision AcuSense technology brings human and vehicle targets classification alarms to front- and back-end devices. The system focuses on human and vehicle targets, vastly improving alarm efficiency and effectiveness.

- High quality imaging with 2 MP resolution
- Clear imaging against strong backlight due to 120 dB WDR technology
- Efficient H.265+ compression technology
- Focus on human and vehicle targets classification based on deep learning
- Water and dust resistant (IP67)

■ Specification

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Max. Resolution	1920 × 1080
Min. Illumination	Color: 0.005 Lux @ (F1.6, AGC ON),B/W: 0 Lux with IR
Shutter Time	1/3 s to 1/100,000 s
Day & Night	IR cut filter
Angle Adjustment	Pan: 0° to 360°,tilt: 0° to 90°,rotate: 0° to 360°
Lens	
Lens Type	Fixed focal lens, 2.8, 4, and 6 mm optional
Focal Length & FOV	2.8 mm, horizontal FOV 107°, vertical FOV 57°, diagonal FOV 127° 4 mm, horizontal FOV 87°, vertical FOV 46°, diagonal FOV 104° 6 mm, horizontal FOV 54°, vertical FOV 29°, diagonal FOV 63°
Lens Mount	M12
Iris Type	Fixed
Aperture	F1.6
Depth of Field	2.8 mm: 1 m to ∞ 4 mm: 1.2 m to ∞ 6 mm: 2.8 m to ∞
DORI	
DORI	2.8 mm: D: 44 m, O: 17 m, R: 9 m, I: 4 m 4 mm: D: 54 m, O: 21 m, R: 11 m, I: 5 m 6 mm: D: 88 m, O: 35 m, R: 18 m, I: 9 m
Illuminator	
Supplement Light Type	IR
Supplement Light Range	-2I: up to 60 m, -4I: up to 80 m
Smart Supplement Light	Yes
IR Wavelength	850 nm
Video	
Main Stream	50 Hz: 25 fps (1920 × 1080, 1280 × 720) 60 Hz: 30 fps (1920 × 1080, 1280 × 720)
Sub-Stream	50 Hz: 25 fps (640 × 480, 640 × 360) 60 Hz: 30 fps (640 × 480, 640 × 360)
Third Stream	50 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360) 60 Hz: 10 fps (1920 × 1080, 1280 × 720, 640 × 480, 640 × 360)
Video Compression	Main stream: H.265/H.264/H.264+/H.265+, Sub-stream: H.265/H.264/MJPEG, Third stream: H.265/H.264
Video Bit Rate	32 Kbps to 8 Mbps
H.264 Type	Baseline Profile,Main Profile,High Profile
H.265 Type	Main Profile
Bit Rate Control	CBR,VBR
Scalable Video Coding (SVC)	H.264 and H.265 encoding
Region of Interest (ROI)	1 fixed region(s) for main stream and sub-stream
Network	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, NTP, UPnP, SMTP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour, SSL/TLS, PPPoE, SNMP, WebSocket, WebSockets
Simultaneous Live View	Up to 6 channels
API	Open Network Video Interface (Profile S, Profile G, Profile T),ISAPI,SDK
User/Host	Up to 32 users 3 user levels: administrator, operator, and user

Security	Password protection, complicated password, HTTPS encryption, 802.1X authentication (EAP-TLS, EAP-LEAP, EAP-MD5), watermark, IP address filter, basic and digest authentication for HTTP/HTTPS, WSSE and digest authentication for Open Network Video Interface, RTP/RTSP over HTTPS, control timeout settings, security audit log, TLS 1.3, host authentication (MAC address)
Network Storage	NAS (NFS, SMB/CIFS),Auto Network Replenishment (ANR)
Client	iVMS-4200,Hik-Connect,Hik-Central
Web Browser	Plug-in required live view: IE 10, IE 11, Plug-in free live view: Chrome 57.0+, Firefox 52.0+, Local service: Chrome 57.0+, Firefox 52.0+
Image	
Image Parameters Switch	Yes
Image Settings	Rotate mode,saturation,brightness,contrast,sharpness,gain,white balance,adjustable by client software or web browser
Day/Night Switch	Day,Night,Auto,Schedule
Wide Dynamic Range (WDR)	120 dB
SNR	≥ 52 dB
Image Enhancement	BLC,HLC,3D DNR
Privacy Mask	Yes
Interface	
Ethernet Interface	1 RJ45 10 M/100 M self-adaptive Ethernet port
On-Board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Reset Key	Yes
Event	
Basic Event	Motion detection (support alarm triggering by specified target types (human and vehicle)),video tampering alarm,exception
Smart Event	Face detection
Linkage	Upload to FTP/NAS/memory card,notify surveillance center,send email,trigger recording,trigger capture
Deep Learning Function	
Perimeter Protection	Line crossing, intrusion Support alarm triggering by specified target types (human and vehicle)
General	
Power	2I: 12 VDC ± 25%, 0.63 A, max. 7.6 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, 36 V to 57 V, 0.25 A to 0.16 A, max. 9 W; 4I: 12 VDC ± 25%, 0.88 A, max. 10.6 W, Ø5.5 mm coaxial power plug, reverse polarity protection, PoE: IEEE 802.3af, Class 3, 36 V to 57 V, 0.34 A to 0.21 A, max. 12 W
Material	Front cover: metal, back cover: metal
Dimension	289 mm × 93.1 mm × 91.2 mm (11.4" × 3.7" × 3.6")
Package Dimension	386 mm × 156 mm × 155 mm (15.2" × 6.2" × 6.2")
Weight	Approx. 1100 g (2.4 lb.)
With Package Weight	Approx. 1599 g (3.5 lb.)
Storage Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Startup and Operating Conditions	-30 °C to 60 °C (-22 °F to 140 °F). Humidity 95% or less (non-condensing)
Language	33 languages: English, Russian, Estonian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Danish, Swedish, Norwegian, Finnish, Croatian, Slovenian, Serbian, Turkish, Korean, Traditional Chinese, Thai, Vietnamese, Japanese, Latvian, Lithuanian, Portuguese (Brazil), Ukrainian
General Function	Heartbeat,anti-flicker,password reset via email,pixel counter

Approval	
EMC	FCC: 47 CFR Part 15, Subpart B, CE-EMC: EN 55032: 2015, EN 61000-3-2:2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4: 2011 +A1: 2014, IC: ICES-003: Issue 7, KC: KN32: 2015, KN35: 2015
Safety	UL: UL 62368-1, CE-LVD: EN 62368-1: 2014/A11: 2017
Environment	CE-RoHS: 2011/65/EU, WEEE: 2012/19/EU, Reach: Regulation (EC) No 1907/2006
Protection	IP67: IEC 60529-2013

■ Typical Application

Hikvision products are classified into three levels according to their anti-corrosion performance. Refer to the following description to choose for your using environment.

This model has NO SPECIFIC PROTECTION.

Level	Description
Top-level protection	Hikvision products

i
s
l
e
v
e
l
a
r
e
e
q
u
i
p
p
e
d
f
o
r
u
s
e
i
n
a
r
e
a
s
w
h
e
r
e
p
r
o
f
e
s
s
i
o
n
a

I
a
n
t
i
-
c
o
r
r
o
s
i
o
n
p
r
o
t
e
c
t
i
o
n
i
s
a
m
u
s
t.
T
y
p
i
c
a
l
a
p
p
l
i
c
a
t
i
o
n
s

c
e
n
a
r
i
o
s
i
n
c
l
u
d
e
c
o
a
s
t
l
i
n
e
s
,
d
o
c
k
s
,
c
h
e
m
i
c
a
l
p
l
a
n
t
s
,
a
n

d
m
o
r
e
.
H
i
k
v
i
s
i
o
n
p
r
o
d
u
c
t
s
a
t
t
h
i
s
l
e
v
e
l
a
r
e
e
q
u
i
p
p
e
d
f
o
r

Moderate protection

u
s
e
i
n
a
r
e
a
s
w
i
t
h
m
o
d
e
r
a
t
e
a
n
t
i
-
c
o
r
r
o
s
i
o
n
d
e
m
a
n
d
s
·
T
y
p
i
c

a
l
a
p
p
l
i
c
a
t
i
o
n
s
c
e
n
a
r
i
o
s
i
n
c
l
u
d
e
c
o
a
s
t
a
l
a
r
e
a
s
a
b
o
u
t
2
k
il
o

m
e
t
e
r
s
(
1
·
2
4
m
i
l
e
s
)
a
w
a
y
f
r
o
m

c
o
a
s
t
l
i
n
e
s
,
a
s
w
e
l
l
a
s
a
r
e
a
s



a
f
f
e
c
t
e
d
b
y
a
c
i
d
r
a
i
n
.

No specific protection



H
i
k
v
i
s
i
o
n
p
r
o
d
u
c
t
s
a
t
t
h
i
s
l
e
v
e
l
a
r


e
e
q
u
i
p
p
e
d
f
o
r
u
s
e
i
n
a
r
e
a
s
w
h
e
r
e
n
o
s
p
e
c
i
f
i
c
a
n
t
i
-
c
o
r
r
o
s
i

■ Available Model

DS-2CD2T23G2-2I(2.8mm)(D)
DS-2CD2T23G2-2I(4mm)(D)
DS-2CD2T23G2-2I(6mm)(D)
DS-2CD2T23G2-2I(2.8mm)
DS-2CD2T23G2-2I(4mm)
DS-2CD2T23G2-2I(4mm)(T)
DS-2CD2T23G2-2I(6mm)
DS-2CD2T23G2-4I(4mm)(BLACK)
DS-2CD2T23G2-4I(2.8mm)(BLACK)
DS-2CD2T23G2-4I(6mm)(BLACK)
DS-2CD2T23G2-2I(2.8mm)(D)(BLACK)
DS-2CD2T23G2-2I(4mm)(D)(BLACK)
DS-2CD2T23G2-2I(6mm)(D)(BLACK)
DS-2CD2T23G2-4I(2.8mm)
DS-2CD2T23G2-4I(4mm)
DS-2CD2T23G2-4I(6mm)
DS-2CD2T23G2-4I(4mm)(T)
DS-2CD2T23G2-4I(2.8mm)(D)
DS-2CD2T23G2-4I(4mm)(D)
DS-2CD2T23G2-4I(6mm)(D)
DS-2CD2T23G2-4I(2.8mm)(D)(BLACK)
DS-2CD2T23G2-4I(6mm)(D)(BLACK)
DS-2CD2T23G2-4I(4mm)(D)(BLACK)
DS-2CD2T23G2-2I(2.8mm)(BLACK)
DS-2CD2T23G2-2I(6mm)(BLACK)

DS-2CD2T23G2-2I(4mm)(BLACK)

Dimension

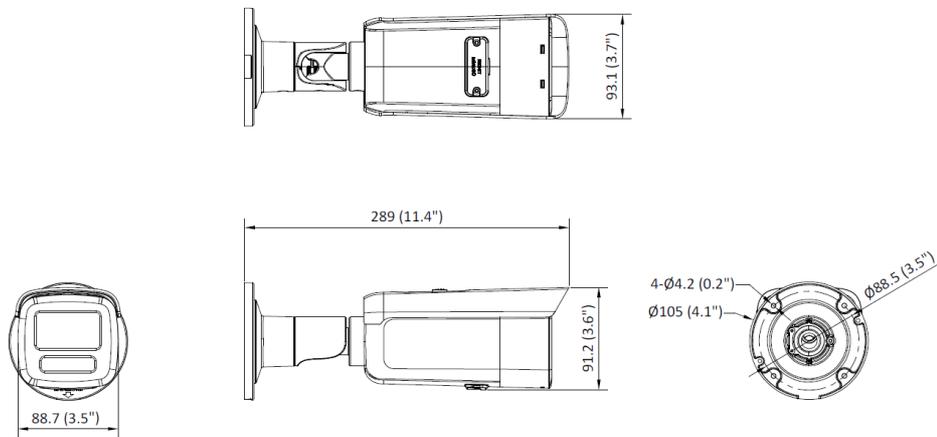

Unit:mm (inch)

Accessory

Optional

DS-1275ZJ-SUS	DS-1275ZJ-S-SUS	DS-1276ZJ-SUS	DS-1260ZJ

Installation Methods

Vertical Pole Mounting DS-1275ZJ-SUS	Vertical Pole Mounting DS-1275ZJ-S-SUS	Corner Mounting DS-1276ZJ-SUS	Junction Box DS-1260ZJ



© F
ex

