

AE-MW1104 10.1-inch VGA Screen



- Stable performance, meet the requirements of vehicle products
- Supports 1-ch video inputs: VGA
- Supports 1-ch camera inputs: AHD/TVI
- Supports parameter settings: brightness, contrast, chromaticity, parameter reset, etc.
- Supports bracket mounting methods, convenient and flexible


Specification

AE-MW1104 10.1-inch VGA screen	
Screen Size	10.1-inch screen
Display Resolution	1024 × 600
Brightness	250-400cd/m ² , adjustable
Backlight	LED
Viewing Angle	140°
Video Input	VGA (800 × 600, 1024 × 768, 1280 × 720, 1920 × 1080; 60Hz)
Working Voltage	DC12V±5%
Power Consumption	≤10W
Operation mode	Key (on the front panel)
Language	English(default), Chinese, German, French, Spanish, Portuguese, Italian, Dutch
Working Temperature	-20°C~+60°C (-4°F~140°F)
Working humidity	10%~80%
Dimension	280.7mm × 72.8mm × 185.7mm(11.1inch × 2.9inch × 7.3inch)
Installation Method	Bracket

Available Model


AE-MW1104(O-NEU)(10"/VGA/M/(Bracket))

Dimension

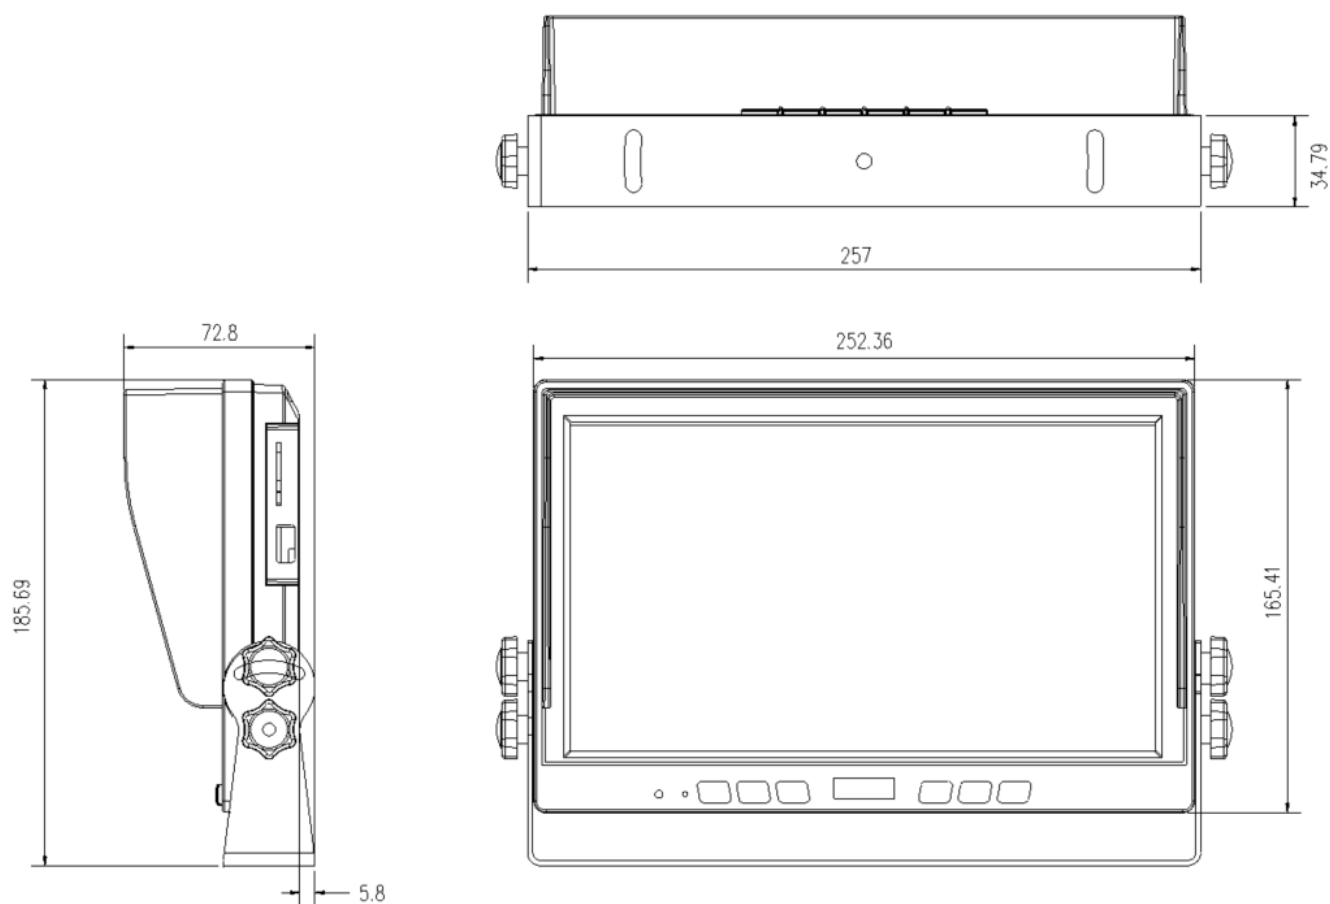

unit: mm

Cable Description

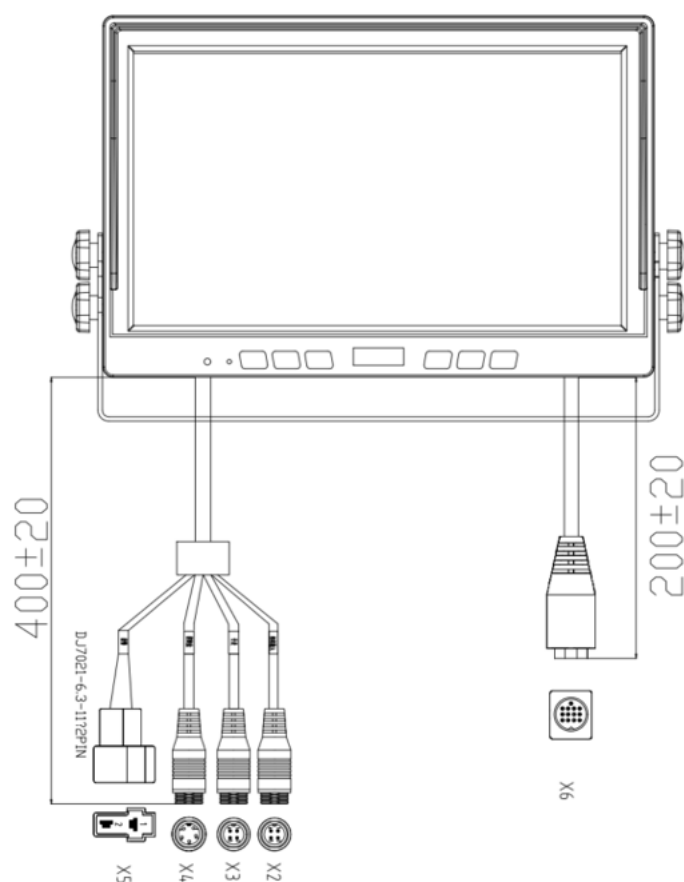

Cable Interface Description

No.	Function	Description				Diagram
X2	Camera Input	1: Video_IN	2: GND	3: NC	4: DC12V_OUT	
X3	Intercom Connector	1: Line_IN	2: Line_OUT	3: DC12V_OUT	4: GND	
X4	Keyboard Connector	1: DC5V_OUT	2: GND	3: RS485-	4: RS485+ 5: GND	
X5	Trigger Input	1: Alarm_IN	2: GND			
X6	Main Connector	1: VGA_R	2: GND	3: VGA_G	4: RS485+	
		5: VGA_HS	6: VGA_VS	7: VGA_B	8: RS485-	
		9: VCC_IN	10: GND	11: GND	12: Line_IN	
		13: Line_OUT				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

